

**CPVC**PRO®

# ADVANCED HOT AND COLD WATER PLUMBING SOLUTIONS

## PRODUCT CATALOGUE



# CONTENTS



**03**

ABOUT ASTRAL

**04**INNOVATION &  
RECOGNITIONS**05**MARKETING  
NETWORK**06**

ABOUT CPVC PRO


**07**PIPE TEMPERATURE  
PRESSURE RATING (°C)**08**STANDARDS &  
SPECIFICATIONS**09**ABOUT NSF  
APPROVAL**10**WHY ASTRAL  
CPVC-PRO**12**KEY  
PROPERTIES**13**FIELDS OF  
APPLICATIONS**14**BASIC PHYSICAL  
PROPERTIES**15**TECHNICAL  
DETAILS**17**FLUID HANDLING  
CHARACTERISTICS  
OF ASTRAL CPVC  
PRO PIPES**21**THERMAL  
EXPANSION AND  
CONTRACTION**23**HORIZONTAL &  
VERTICAL SUPPORTS**24**UNDERGROUND  
INSTALLATION**25**REQUIREMENT  
OF THERMALLY  
INSULATED  
CPVC PIPE**26**PRODUCT  
RANGE**50**INSTALLATION  
PROCEDURE**52**HOW TO USE  
SOLVENT CEMENT  
PRIMER & CLEANER**53**PRESSURING  
SOLVENT  
ADHESIVE JOINTS**54**IMPORTANT  
NOTES**55**GENERAL  
GUIDELINE FOR  
ALL INSTALLATIONS

1<sup>st</sup> TO  
INTRODUCE  
CPVC  
IN INDIA

1<sup>st</sup> TO  
INTRODUCE  
UPVC LEAD  
FREE PIPES  
IN INDIA

1<sup>st</sup> TO  
INTRODUCE  
LOW NOISE  
PP DRAINAGE  
PIPES IN INDIA

1<sup>st</sup> TO  
INTRODUCE  
FOAMED PVC  
DRAINAGE  
PIPES IN INDIA

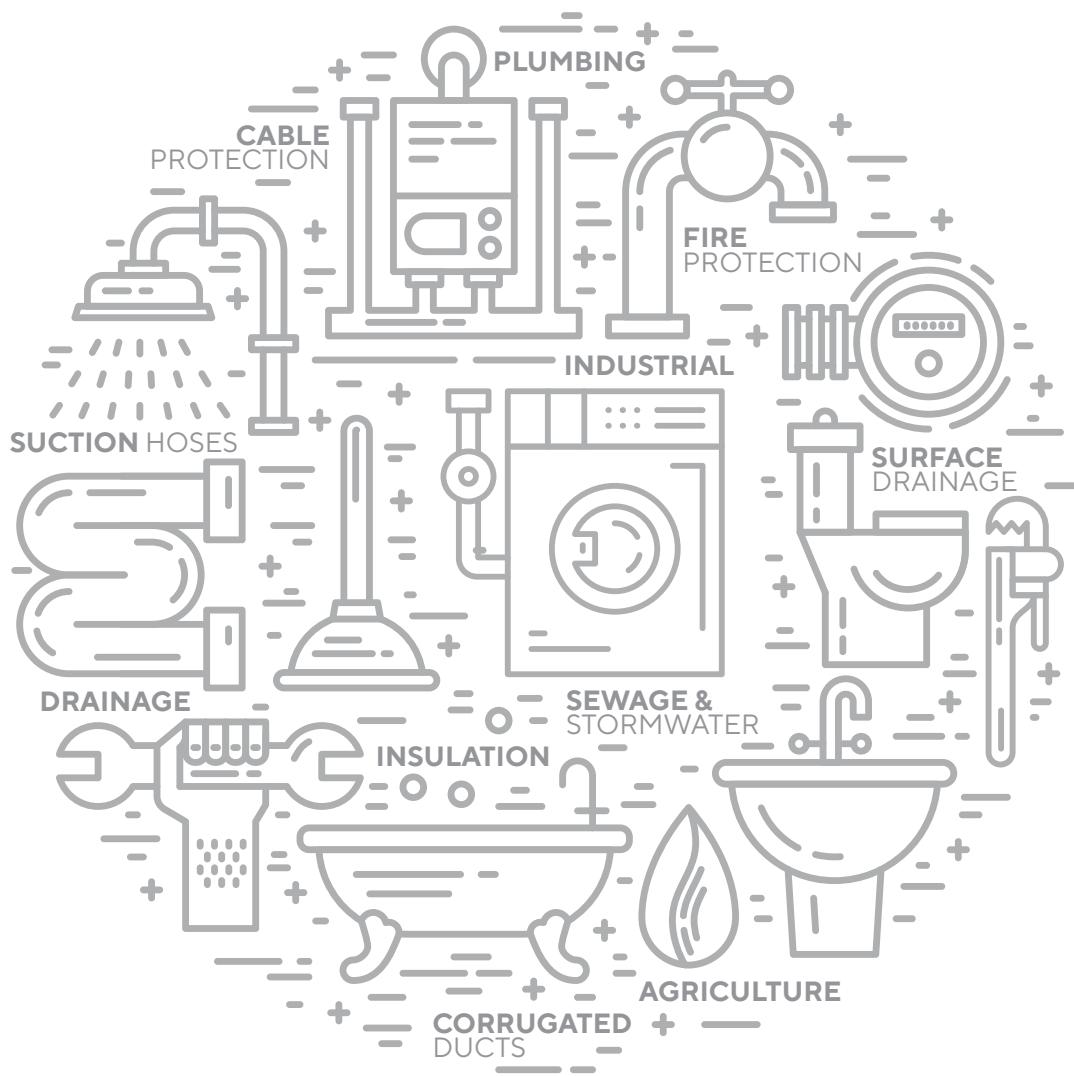

1<sup>st</sup> TO  
INTRODUCE  
LEAD FREE  
COLUMN PIPES  
IN INDIA

1<sup>st</sup> TO  
INTRODUCE  
POLYMER BASED  
INDUSTRIAL  
PIPING SYSTEM  
IN INDIA

1<sup>st</sup> TO  
INTRODUCE  
NSF APPROVED  
SOLVENT  
CEMENT  
IN INDIA

1<sup>st</sup> TO  
INTRODUCE  
CPVC PIPING FOR  
AUTOMATIC  
FIRE SPRINKLER  
SYSTEM IN INDIA

# ASTRAL, INDIA'S PROGRESSIVE BUILDING MATERIALS COMPANY

Established in 1996 with the aim to manufacture best-in-globe plastic piping systems, Astral Pipes fulfils emerging piping needs of millions of houses and adds extra mileage to India's developing real estate fraternity with the hallmark of unbeaten quality and innovative piping solutions. Keeping itself ahead of the technology curve, Astral has always been a front runner in the piping category by bringing innovation and getting rid of old, primitive and ineffective plumbing methods. Bringing CPVC in India, and pioneering in this technology, have set Astral apart and its highest quality enabled it to obtain NSF approval for its CPVC pipes and fittings. Astral went beyond the category codes by launching many industry firsts, like launching India's first lead-free uPVC pipes for plumbing as well as for stream water, just to name a few.

Astral Pipes offers the widest product range across this category when it comes to product applications. Astral Pipes is equipped with production facilities at Santej and Dholka in Gujarat, Hosur in Tamil Nadu, Ghiloth in Rajasthan, Sangli & Aurangabad in Maharashtra, and Sitarganj in Uttarakhand to manufacture plumbing systems, drainage systems, agriculture systems, fire sprinkler piping systems, industrial piping and electrical conduit pipes with all kinds of necessary fittings.

Astral Pipes' Infrastructure division Rex offers a comprehensive product range including corrugated piping for drainage and cables, polyolefin cable channels, sewage treatment plants, plastic sheathing ducts, suction hoses, and sub-surface drainage systems. This range helps Astral to establish a strong foothold in infrastructure and agriculture sector in the constantly evolving business of piping.

In 2014, Astral forayed into the adhesives category by acquiring UK-based Seal It Services Ltd. and Kanpur based Resinova Chemie Ltd., which manufacture adhesives, sealants and construction chemicals. With five manufacturing facilities now in this business segment, Astral has strengthened its presence in the category and made rapid inroads.

In the year 2020, Astral has expanded its product portfolio and entered into the Water Tanks Segment. The water tank segment is an expanded domain of plumbing and water supply with a huge nationwide potential. Astral Pipes manufactures water tanks from its Santej, Aurangabad, Hosur & Ghiloth manufacturing facilities. The new addition in the product offering will help Astral author a next chapter of success and will establish it as a prominent player in building materials industry.

## ADHESIVES

EPOXY ADHESIVES & PUTTY  
SILICONE SEALANTS  
CONSTRUCTION CHEMICALS **PVA**  
CYANOACRYLATE **SOLVENT CEMENTS**  
**TAPES** **POLYMERIC FILLING COMPOUND**  
ANAEROBIC ADHESIVES  
INDUSTRIAL ADHESIVES  
**INSTANT HAND SANITIZER**  
SURFACE CLEANING PRODUCTS

## PIPING

PLUMBING PIPES & FITTINGS  
**CPVC, PVC & PEX**  
SEWERAGE DRAINAGE PIPES & FITTINGS  
**AGRICULTURE** PIPES & FITTINGS  
**INDUSTRIAL PIPES & FITTINGS**  
FIRE SPRINKLERS PIPES & FITTINGS  
**CONDUIT & CABLE PROTECTION**  
ANCILLARY PRODUCTS  
**URBAN** INFRASTRUCTURE

## DUCTING






## INNOVATION & RECOGNITIONS

- First to introduce CPVC piping system in India (1999)
- First to launch lead free uPVC piping system in India (2004)
- Corp Excel- National SME Excellence Award (2006)
- First to get NSF Certification for CPVC piping system in India (2007)
- First to launch lead-free uPVC column pipes in India (2012)
- Enterprising Entrepreneur of the year (2012-13)
- Business Standard Star SME of the year (2013)
- Inc. India Innovative 100 for Smart Innovation under category of 'Technology' (2013)
- India's Most Promising Brand Award (2014)
- Value Creator Award during the first ever Fortune India Next 500 (2015)
- India's Most Trusted Pipe Brand Award (2016, 2019, 2020 & 2022)
- ET Inspiring Business Leaders of India Award (2016)
- India's Most Attractive Pipe Brand Award (2016)
- Fortune India 500 Company (2016)
- Consumer Validated Superbrands India (2017, 2019, 2021 & 2022)



# MARKETING NETWORK

Astral has a marketing network of more than 800 distributors and 30,000 dealers spread all over India with branch offices at Mumbai, Pune, Delhi, Bengaluru, Chennai, Hyderabad, Jaipur, Lucknow and Kochi. Apart from that Astral has its own warehouses at Vijaywada, Hyderabad, Delhi, Kolhapur, Kolkata, Nagpur, Indore, Patna, Varanasi, Jaipur & Hosur to deliver the material as quick as possible. More than 400 techno marketing professionals and administrative personnel are on the board to coordinate with architects, plumbing contractors and plumbers to utilize the best plumbing techniques and to get the best from the products.

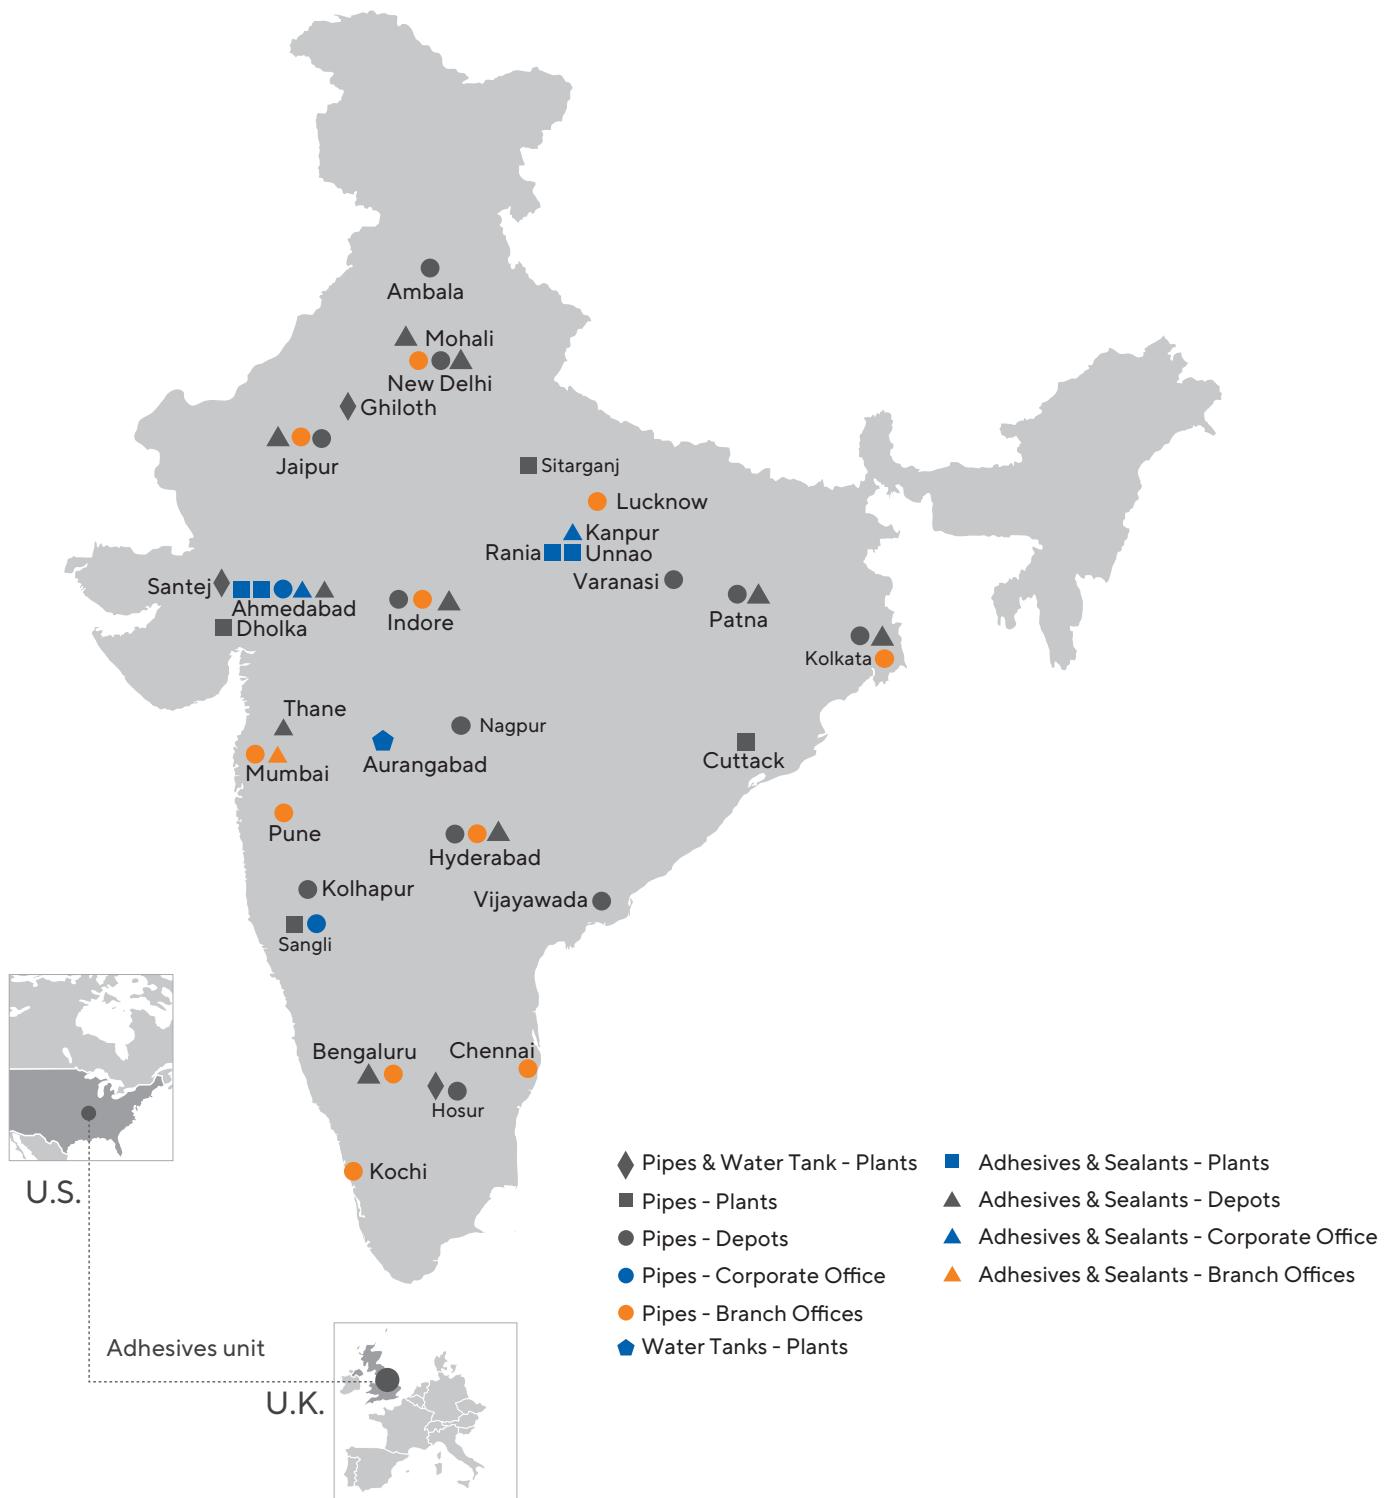



## ABOUT **ASTRAL** **CPVC PRO**<sup>®</sup>

Astral CPVC PRO is a class apart in the category, it is more than just a hot and cold plumbing system. To us it is an initiative, to deliver a world class plumbing solution.

Astral CPVC PRO pipe and fittings, manufactured by Astral Limited, are made from the specialty plastic, chemically known as Chlorinated Poly Vinyl Chloride [CPVC]. The CPVC compound shall meet cell class DP 110-2-3-2 as per IS:15778 and a maximum service temperature up to 93°C. The compound is carefully designed in our R & D and backed by our own expertise of manufacturing CPVC piping system from 19 years,

which will give excellent results in all applications for CPVC piping system. It is unique combination of highest Impact resistance without any loss in pressure bearing capacity / Tensile strength or Vicat softening temperature. This will ensure best trouble free service and also stood notch above the initial installation issues of cracking / damages due to handling, storage and installation.

The pipes are produced in copper tube size (CTS) from 15 mm (½") to 50 mm (2") with two different standard dimensional ratios - SDR 11 and SDR 13.5 (Class 1 & Class 2 respectively as per IS:15778) . The fittings are produced as per SDR 11. The pipes and fittings in SDR 11 class is also complies to ASTM standard. All Astral CPVC SDR 11 and SDR 13.5 pipes are made from identical CPVC compound material having same physical properties. The CPVC fittings are manufactured from compound material which meets all the requirement as per ASTM standard. Apart from having the same physical properties, SDR 11 and SDR 13.5 which are having different wall thickness and therefore, at any given temperature, they have different pressure ratings. For e.g.

## PIPE TEMPERATURE PRESSURE RATING (°C)

GRADE	UNIT	23°C	82°C
SDR 11	psi	400	100
	kg/cm <sup>2</sup>	28.1	7.0
SDR 13.5	psi	320	80
	kg/cm <sup>2</sup>	22.5	5.6

Astral also produces CPVC PRO pipes in iron pipe size (IPS), available sizes are 65 mm (2½") to 300 mm (12") in SCH 40 and SCH 80 which meets the requirements of ASTM F 441. The pressure ratings varies with schedule pipe size and temperature. CPVC pipes of Copper Tube Size (CTS) dimensions can also be connected to CPVC (IPS) dimensions by using IPS x CTS fittings.



# STANDARDS & SPECIFICATIONS

**ASTM D1784** Standard Specification for Rigid Poly (Vinyl Chloride) (PVC) Compounds and Chlorinated Poly (Vinyl Chloride) (CPVC) Compounds.

**ASTM D2846** Specification for Chlorinated Poly (Vinyl Chloride) (CPVC) Plastic Hot & Cold water distribution systems.

**ASTM F493** Standard Specification for Solvent Cements for Chlorinated Poly (Vinyl Chloride) (CPVC) Plastic Pipe & Fittings.

**ASTM F441** Standard Specification for Chlorinated Poly (Vinyl Chloride) (CPVC) Plastic Pipe, SCH 40 & 80.

**ASTM F438** Socket-Type Chlorinated Polyvinyl Chloride Plastic Pipe Fittings. SCH 40.

**ASTM F439** Socket-Type Chlorinated Polyvinyl Chloride Plastic Pipe Fittings. SCH 80.

**ASTM D2774** Underground installation of Thermoplastic pipes.

**IS:15778** Chlorinated poly vinyl chloride (CPVC) pipe for potable hot & cold water distribution supplies.

**IS:17546** Chlorinated Polyvinyl Chloride ( CPVC ) Fittings For Potable Hot And Cold Water Distribution Supplies.

## PRODUCT RANGE

Class 1 (SDR 11) & Class 2 (SDR 13.5): 15 mm (½") to 50 mm (2") CTS -Confirming to IS:15778:2007 As per ASTM D2846

SCH 40: 65 mm (2½") to 150 mm (6") IPS As per ASTM F441 & ASTM F438

SCH 80: 65 mm (2½") to 300 mm (12") IPS As per ASTM F441 & ASTM F439

## MARKING & UNIFORMITY

Pipes and fittings made from CPVC compound are clearly marked with the manufacturers trademark, material designation, applicable ASTM standard.

SDR 11 Pipe: Tan coloured with red stripe

SDR 13.5 Pipe: Tan coloured with brown stripe

SDR 11 fittings: Tan colour

SCH 40 Pipe: Tan colour with brown stripe

SCH 40 fittings: Tan colour

SCH 80 Pipe: Tan colour with red stripe

SCH 80 fittings: Tan colour / Grey colour



# ASTRAL CPVC PRO PIPE AND FITTINGS ARE THE BEST CHOICE FOR HOT AND COLD POTABLE WATER DISTRIBUTION



## THE RAW MATERIAL

Astral CPVC Pro pipes and fittings are manufactured with specially designed CPVC Compound formulated by Astral itself. The compound is mixture of imported CPVC Resin and other ingredients like Impact Modifiers, Lubricants, UV stabilizers etc.

The compound for pipes and fittings are carefully designed in our R&D facility and checked for different properties like Dynamic Thermal Stability, Fusion, Torque and all other rheological properties. Thus designed CPVC compound can give highest processibility as well as best Physical and Mechanical properties.

The compound meets or exceed all requirements for cell classification for IS:15778 and ASTM D2846.

The material is also approved by NSF for its safe use with potable water and thus completely safe for drinking water.

## ABOUT NSF APPROVAL

Astral Limited is proud to announce that Astral CPVC PRO is approved by NSF International, a leading global independent public health and safety organization. To receive certification, Astral Limited submitted product samples to NSF that underwent rigorous testing to recognized standards and agreed to unannounced manufacturing facility audits and periodic retesting to verify continued conformance to the standards. Find us in the NSF water listings by visiting <http://www.nsf.org/certified-products-systems>.

### ABOUT NSF INTERNATIONAL

NSF International is a global independent organization that writes standards and protocols and tests and certifies products for the food, water and consumer goods industries to minimize adverse health effects and protect the environment. NSF operates in over 165 countries. Founded in 1944, NSF is a Pan American Health Organization/World Health Organization Collaborating Center on Food Safety, Water Quality and Indoor Environment.

# WHY ASTRAL CPVC PRO

## INTRODUCED CPVC FOR THE FIRST TIME IN INDIA

There was a time when CPVC pipes were not accepted by the industry. This was mainly because GI pipes were 30% cheaper than CPVC pipes. So strength of steel and cost were major factors why GI pipes were norms. But Astral introduced CPVC pipes in India for the first time embarking upon anti-corrosion and hot water compatibility. Since then, Astral CPVC has been a flagship CPVC product leading the way in the market.

1<sup>st</sup> TO  
INTRODUCE  
CPVC  
IN INDIA

## HIGHEST NUMBER OF CERTIFICATIONS

NSF, BIS and IAPMO Certifications : Astral the only pipe manufacturing company in India having most prestigious quality approval from National Sanitation Foundation (NSF), Bureau of Indian Standards (BIS) and certifications from IAPMO.



\*ONLY THOSE PRODUCTS BEARING THE ABOVE MARKS ARE CERTIFIED.


## STATE OF THE ART MANUFACTURING

Astral is equipped with state of art manufacturing facilities at Santej, Hosur and Ghiloth plants. High speed and accurate extruders and injection molding machines including innovative manufacturing techniques being used to manufacture the ultra modern, errorless Astral CPVC PRO pipes and fittings.



## **WIDEST PRODUCT RANGE**

Astral is the only company that provides the pipes with sizes ranging from 1/2" to 12" diameter. Hence you can meet any requirement with this widest range of CPVC pipes.

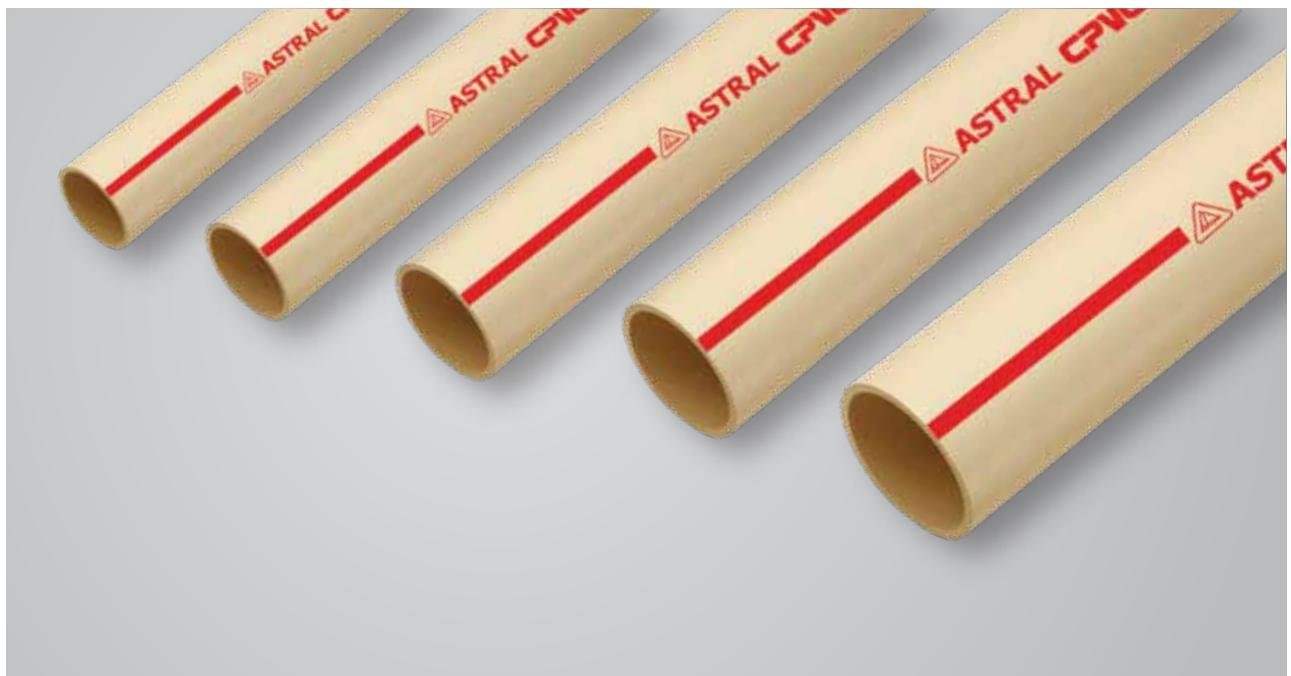

## **TOTAL BACKWARD INTEGRATION**

All of Astral's CPVC Pipes and Fittings are made from CPVC Compound which is manufactured and controlled by Astral at every stage of the process. This backward integration helps us consistently maintain the highest quality for all pipes and fittings.

## **SKILL DEVELOPMENT INITIATIVES FOR PLUMBERS**

Astral provides training to plumbers and plumbing contractors throughout the year by updating them about modern plumbing techniques and to do plumbing work more effectively and professionally.

# KEY PROPERTIES



## CORROSION RESISTANCE

Astral CPVC PRO pipe gives excellent resistance even under the harshest of water conditions so there are none of the purity worries from corrosion of metal pipe or soldered joints. Astral CPVC PRO pipe keeps pure water pure.



## EASY PLUMBING PROCESS

CPVC uses a simple, solvent cement jointing method. Tools required are very simple and inexpensive (chamfering tool and pipe cutter only) and avoid the need for an electrical source. Also due to superior insulation properties compare to copper and GI, this system saves installation cost.



## LOWER BACTERIAL GROWTH

Bacteria build up with CPVC is far lower than with alternative piping materials due to very smooth internal surface. It does not deteriorate quality of water and prevents contamination, unpleasant odour, bad taste and discolouration of water.



## UNAFFECTED BY CHLORINE IN WATER

Some materials may be adversely affected by chlorine contained in the water supply, which can cause breakdown of the polymer chains and potential leaks. In this respect, Astral CPVC PRO pipe is unaffected by the chlorine present in potable water supply.



## NO SCALE, PIT OR LEACH FORMATION

Even after years of use in the most aggressive conditions, this pipe won't corrode, standing against low pH water, coastal salt, air exposures and corrosive soils. It stays as solid and reliable as the day it was installed, maintaining full water carrying capacity.



## HOT WATER COMPATIBLE

Astral CPVC PRO pipe is compatible with both hot and cold water. It withstand very high temperature upto 93°C. Many solar, electric and gas water heaters have CPVC piping system for heat efficiency and lower installation cost.



## LOW THERMAL EXPANSION

Astral CPVC PRO pipe has a lower coefficient of thermal expansion, reducing the amount that the pipe expands when hot water is running, again reducing unsightly 'looping' of the pipe.



## TOUGH, RIGID MATERIAL

Astral CPVC PRO pipe has a much higher strength than other thermoplastics used in plumbing. Hence, it needs less hangers and supports and there is no unsightly looping of the pipe. It has a higher pressure bearing capability, leading to the same flow rate with a smaller size. Also having high UV resistance, life span is more than 50 years.



## FIRE SAFETY

CPVC has a Limiting Oxygen Index (LOI) of 60. Thus in air, Astral CPVC PRO pipe does not support combustion. No flaming drips, does not increase the fire load, low flame spread, low smoke generation.



## APPROVED WORLDWIDE

CPVC plumbing system is approved for contact with potable water in wide range of countries including USA, UK, Canada, Germany, France, The Netherlands, Middle East, Africa etc.


# FIELDS OF APPLICATIONS

Astral CPVC PRO Pipes are ideal for

Hot and Cold water applications in

- Homes, apartments
- Hotels, resort
- Hospitals
- High and low rise buildings
- Corporate and commercial houses
- Academic institutes


etc. for pure and hygienic water supply.



# BASIC PHYSICAL PROPERTIES

PROPERTY	TEST METHOD	ENGLISH UNIT	SI UNIT
<b>GENERAL PROPERTIES</b>			
Specific Gravity @ 23°C	ASTM D792	1.50 g/cm <sup>3</sup>	1.50 g/cm <sup>3</sup>
Specific volume @ 23°C	-	0.666 cm <sup>3</sup> /g	0.666 cm <sup>3</sup> /g
Water Absorption @ 23°C	ASTM D570	0.02%	0.02%
Water Absorption @ 100°C	ASTM D570	0.50%	0.50%
Cell Class	ASTM D1784	23447-B	D.P.110-2-3-2
Rockwell Hardness @ 23°C	ASTM D785	119	-
<b>MECHANICAL PROPERTIES</b>			
Izod Impact (Notched) @ 23°C	ASTM D256	4.5ft.lbs/in	267 J/m
Tensile Strength @ 23°C	ASTM D638	8000 psi	55 N/mm <sup>2</sup>
Tensile Modulus @ 23°C	ASTM D638	3,94,000 psi	2710 N/mm <sup>2</sup>
Flexural Strength @ 23°C	ASTM D790	15,100 psi	104N/mm <sup>2</sup>
Flexural Modulus @ 23°C	ASTM D790	4,15,100 psi	2860N/mm <sup>2</sup>
Compressive Strength @ 23°C	ASTM D695	10,200 psi	71 N/mm <sup>2</sup>
Compressive Modulus @ 23°C	ASTM D695	1,97,500 psi	1360 N/mm <sup>2</sup>
<b>THERMAL PROPERTIES</b>			
Coefficient of Thermal Expansion	ASTM D696	3.4X10 <sup>-5</sup> in/in/°F	6.3 X10 <sup>-5</sup> m/m/°K
Thermal Conductivity	ASTM C177	0.95 BTU/(hr.ft <sup>2</sup> .°F)	0.14 W/mk
Heat Distortion Temperature	ASTM D648	221°F	105°C
Heat Capacity@23°C	DSC	0.21BTU/lb°F	0.90J/gK
Heat Capacity@100°C		0.26 BTU/lb°F	1.10J/gK
<b>FLAMMABILITY</b>			
Flammability Rating	UL94	0.062inch/0.157cm	VO,5VA&5VB
Burning Rate	ASTM D635	Self Extinguishing	Self Extinguishing
Flame spread	ASTM E84	15	-
Smoke developed	ASTM E84	70-125	-
Limiting oxygen index	ASTM D2863	60%	-
<b>ELECTRICAL</b>			
Dielectric Strength	ASTM D147	1250 V/mil	492,000 V/cm
Dielectric Constant @ 60Hz, -1°C	ASTM D150	3.7	3.7
Power Factor @ 1000 Hz	ASTM D150	0.007%	0.007%
Volume Resistivity @ 23°C	ASTM D257	3.4x10 <sup>15</sup> ohm/cm	3.4x10 <sup>15</sup> ohm/cm

Note: Above values are typical values. It should be used as a general recommendation. Do not consider as a specification

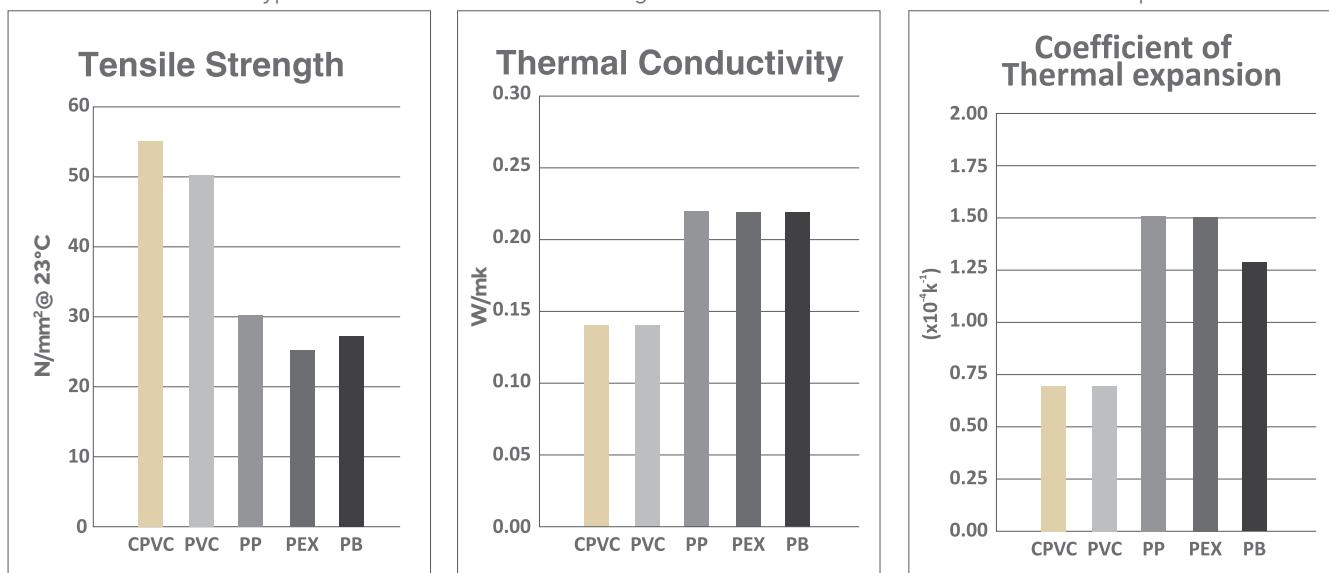

# TECHNICAL DETAILS

Nominal Size			Outside Diameter, Inch (mm)			Wall Thickness, Inch (mm)			Pipe Pr. R. psi (kg/cm <sup>2</sup> )			
cm	(mm)	in.	Average	Tolerance		Minimum	Tolerance		73.4°F	(23°C)	180°F	(82°C)
<b>Outside Diameters and Wall Thicknesses For CPVC 4120, SDR 11 Plastic Pipe As Per ASTM D-2846 &amp; conforming to IS: 15778</b>												
1.5	(15)	1/2*	0.625	(15.9)	± 0.003	(0.08)	0.068	(1.73)	+ 0.020	(0.51)	400	(28.1)
2.0	(20)	3/4	0.875	(22.2)	± 0.003	(0.08)	0.080	(2.03)	+ 0.020	(0.51)	400	(28.1)
2.5	(25)	1	1.125	(28.6)	± 0.003	(0.08)	0.102	(2.59)	+ 0.020	(0.51)	400	(28.1)
3.2	(32)	1 1/4	1.375	(34.9)	± 0.003	(0.08)	0.125	(3.18)	+ 0.020	(0.51)	400	(28.1)
4.0	(40)	1 1/2	1.625	(41.3)	± 0.004	(0.10)	0.148	(3.76)	+ 0.020	(0.51)	400	(28.1)
5.0	(50)	2	2.125	(54.0)	± 0.004	(0.10)	0.193	(4.90)	+ 0.023	(0.58)	400	(28.1)

\* For 1/2" wall thickness minimum is not a function of SDR.

Pr. R. = Pressure Rating

Nominal Size			Outside Diameter, Inch (mm)			Wall Thickness, Inch (mm)			Pipe Pr. R. psi (kg/cm <sup>2</sup> )			
cm	(mm)	in.	Average	Tolerance		Minimum	Tolerance		73.4°F	(23°C)	180°F	(82°C)
<b>Outside Diameters and Wall Thicknesses For CPVC 4120, SDR 13.5 Plastic Pipe conforming to IS: 15778</b>												
1.5	(15)	1/2*	0.625	(15.9)	± 0.003	(0.08)	0.055	(1.40)	+ 0.020	(0.51)	320	(22.5)
2.0	(20)	3/4	0.875	(22.2)	± 0.003	(0.08)	0.065	(1.65)	+ 0.020	(0.51)	320	(22.5)
2.5	(25)	1	1.125	(28.6)	± 0.003	(0.08)	0.083	(2.12)	+ 0.020	(0.51)	320	(22.5)
3.2	(32)	1 1/4	1.375	(34.9)	± 0.003	(0.08)	0.102	(2.59)	+ 0.020	(0.51)	320	(22.5)
4.0	(40)	1 1/2	1.625	(41.3)	± 0.004	(0.10)	0.120	(3.06)	+ 0.020	(0.51)	320	(22.5)
5.0	(50)	2	2.125	(54.0)	± 0.004	(0.10)	0.157	(4.00)	+ 0.023	(0.58)	320	(22.5)

\* For 1/2" wall thickness minimum is not a function of SDR.

Pr. R. = Pressure Rating

Nominal Size			Outside Diameter, Inch (mm)			I.D. Inch (mm)	Wall Thickness, Inch (mm)			Pipe Pr. R. psi (kg/cm <sup>2</sup> )		
cm	(mm)	in.	Average	Tolerance		Average	Minimum	Tolerance	73.4°F	(23°C)		
<b>Outside Diameters, Wall Thickness &amp; Pressure Rating For CPVC 4120, Schedule 40 Piping System As per ASTM F 441</b>												
6.5	(65)	2 1/2	2.875	(73.0)	± 0.007	(0.18)	2.444	(62.07)	0.203	(5.16)	+ 0.024	(0.61)
8.0	(80)	3	3.500	(88.9)	± 0.008	(0.20)	3.041	(77.26)	0.216	(5.49)	+ 0.026	(0.66)
10.0	(100)	4	4.500	(114.3)	± 0.009	(0.23)	3.778	(95.97)	0.337	(8.56)	+ 0.040	(1.02)

Pr. R. = Pressure Rating

Nominal Size			Outside Diameter, Inch (mm)			I.D. Inch (mm)	Wall Thickness, Inch (mm)			Pipe Pr. R. psi (kg/cm <sup>2</sup> )		
cm	(mm)	in.	Average	Tolerance		Average	Minimum	Tolerance	73.4°F	(23°C)		
<b>Outside Diameters, Wall Thickness &amp; Pressure Rating For CPVC 4120, Schedul 80 Piping System As per ASTM F 441</b>												
6.5	(65)	2 1/2	2.875	(73.0)	± 0.007	(0.18)	2.288	(58.14)	0.276	(7.01)	+ 0.033	(0.84)
8.0	(80)	3	3.500	(88.9)	± 0.008	(0.20)	2.864	(72.75)	0.300	(7.62)	+ 0.036	(0.91)
10.0	(100)	4	4.500	(114.3)	± 0.009	(0.23)	3.778	(95.97)	0.337	(8.56)	+ 0.040	(1.02)
15.0	(150)	6	6.625	(168.3)	± 0.011	(0.28)	5.710	(145.04)	0.432	(10.97)	+ 0.052	(1.32)
20.0	(200)	8	8.625	(219.1)	± 0.015	(0.38)	7.565	(192.15)	0.500	(12.70)	+ 0.060	(1.52)
25.0	(250)	10	10.750	(273.1)	± 0.015	(0.38)	9.493	(241.12)	0.593	(15.06)	+ 0.071	(1.80)
30.0	(300)	12	12.750	(323.90)	± 0.015	(0.38)	11.294	(286.87)	0.687	(17.45)	+ 0.082	(2.08)



Pr. R. = Pressure Rating

## Temperature Derating Factors

Working Temperature (°F)	73-80	90	100	120	140	160	180	200
Working Temperature (°C)	23-25	32	38	49	60	71	82	93
Pipe Derating Factor	1.00	0.91	0.82	0.65	0.50	0.40	0.25	0.20
Valve Derating Factor	1.00	0.95	0.90	0.80	0.70	0.61	0.53	0.45

N.B.: For obtaining working pressure in system, multiply the maximum pressure with derating factor at the working temperature of system.


\* Valves, Unions & Speciality Products have different elevates temperature rating than pipe.

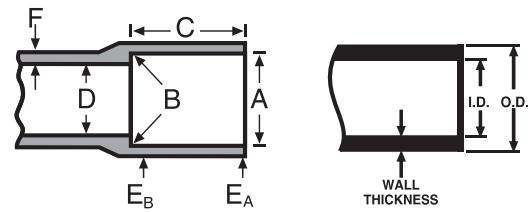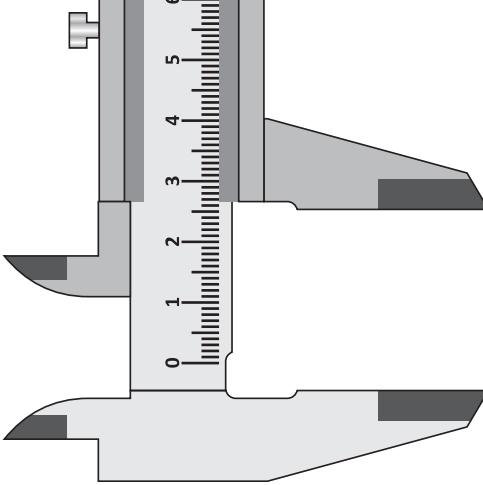

Nominal Size (in.)	Socket Entrance Diameter inch (mm)		Socket Bottom Diameter inch (mm)		Socket Length inch (mm)	Inside Diameter inch (mm)	Wall Thickness in (mm)			
	'A' Average	'A' Tolerance	'B' Average	'B' Tolerance			'C' min.	'D' min.	'E_A' min.	'E_B' min.
1/2 (15)	0.633 (16.08)	± 0.003 (0.08)	0.619 (15.72)	± 0.003 (0.08)	0.500 (12.70)	0.489 (12.42)	0.068 (1.73)	0.102 (2.59)	0.128 (3.25)	
3/4 (20)	0.884 (22.45)	± 0.003 (0.08)	0.870 (22.10)	± 0.003 (0.08)	0.700 (17.78)	0.715 (18.16)	0.080 (2.03)	0.102 (2.59)	0.128 (3.25)	
1 (25)	1.135 (28.83)	± 0.003 (0.08)	1.121 (28.47)	± 0.003 (0.08)	0.900 (22.86)	0.921 (23.39)	0.102 (2.59)	0.102 (2.59)	0.128 (3.25)	
1 1/4 (32)	1.386 (35.20)	± 0.003 (0.08)	1.372 (34.85)	± 0.003 (0.08)	1.100 (27.94)	1.125 (28.58)	0.125 (3.18)	0.125 (3.18)	0.156 (3.96)	
1 1/2 (40)	1.640 (41.66)	± 0.004 (0.10)	1.622 (41.20)	± 0.004 (0.10)	1.300 (33.02)	1.329 (33.76)	0.148 (3.76)	0.148 (3.76)	0.185 (4.70)	
2 (50)	2.141 (54.38)	± 0.004 (0.10)	2.123 (53.92)	± 0.004 (0.10)	1.700 (43.18)	1.739 (44.17)	0.193 (4.90)	0.193 (4.90)	0.241 (6.12)	

#### Tapered Socket Dimensions For CPVC 4120, SDR 11, Plastic Pipe Fittings AS PER ASTM D2846

1/2 (15)	0.633 (16.08)	± 0.003 (0.08)	0.619 (15.72)	± 0.003 (0.08)	0.500 (12.70)	0.489 (12.42)	0.068 (1.73)	0.102 (2.59)	0.128 (3.25)
3/4 (20)	0.884 (22.45)	± 0.003 (0.08)	0.870 (22.10)	± 0.003 (0.08)	0.700 (17.78)	0.715 (18.16)	0.080 (2.03)	0.102 (2.59)	0.128 (3.25)
1 (25)	1.135 (28.83)	± 0.003 (0.08)	1.121 (28.47)	± 0.003 (0.08)	0.900 (22.86)	0.921 (23.39)	0.102 (2.59)	0.102 (2.59)	0.128 (3.25)
1 1/4 (32)	1.386 (35.20)	± 0.003 (0.08)	1.372 (34.85)	± 0.003 (0.08)	1.100 (27.94)	1.125 (28.58)	0.125 (3.18)	0.125 (3.18)	0.156 (3.96)
1 1/2 (40)	1.640 (41.66)	± 0.004 (0.10)	1.622 (41.20)	± 0.004 (0.10)	1.300 (33.02)	1.329 (33.76)	0.148 (3.76)	0.148 (3.76)	0.185 (4.70)
2 (50)	2.141 (54.38)	± 0.004 (0.10)	2.123 (53.92)	± 0.004 (0.10)	1.700 (43.18)	1.739 (44.17)	0.193 (4.90)	0.193 (4.90)	0.241 (6.12)

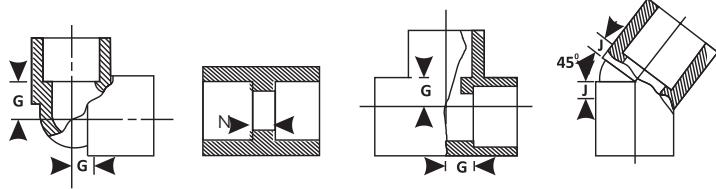

Nominal Size (mm)	Threads (Per Inch) (in.)	Effective Thread Length (L) inch	Pitch of Thread (P) inch


Nominal Size (mm)	(G) min. inch	(J) min. inch	(N) min. inch

#### American National Standard Taper Pipe Threads (NPT) Ansi Standard B1.20.1 ASTM Standard F1498

15	1/2	14	0.5337	0.07143
20	3/4	14	0.5457	0.07143
25	1	1 1/2	0.6828	0.08696
32	1 1/4	1 1/2	0.7068	0.08696
40	1 1/2	1 1/2	0.7235	0.08696
50	2	1 1/2	0.7565	0.08696
65	2 1/2	8	1.1375	0.12500
80	3	8	1.2000	0.12500
100	4	8	1.3000	0.12500

#### Minimum Dimensions from Center to End of Socket (Laying Length) for CPVC 4120, SDR 11 Plastic Tubing Fittings\* Per ASTM D 2846

15	1/2	0.382	0.183	0.102
20	3/4	0.507	0.235	0.102
25	1	0.633	0.287	0.102
32	1 1/4	0.758	0.339	0.102
40	1 1/2	0.884	0.391	0.102
50	2	1.134	0.495	0.102

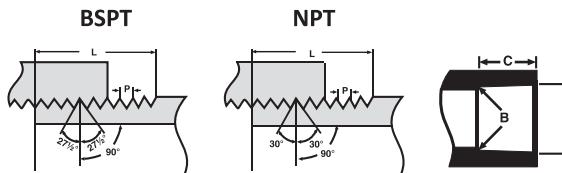

Nominal Size (mm)	Threads (Per Inch) (in.)	Effective Thread Length (L) mm	Pitch of Thread (P) mm

Nominal Size (mm)	Diameter (in.)	Socket Length Minimum C (in)
Socket Entrance A (mm)	Socket Bottom B (mm)	Tolerance
SCH 40	SCH 80	

#### BSP ISO 7/1 Parallel Threads

15	1/2	14	13.152	1.8143
20	3/4	14	14.514	1.8143
25	1	11	16.714	2.3091
32	1 1/4	11	19.050	2.3091
40	1 1/2	11	19.050	2.3091
50	2	11	23.378	2.3091
65	2 1/2	11	26.698	2.3091
80	3	11	29.873	2.3091
100	4	11	35.791	2.3091

#### Basic Socket Dimensions

#### Schedule 40 CPVC Fittings As Per ASTM F 438

#### Schedule 80 CPVC Fittings As Per ASTM F 439

65	2 1/2	2.889	2.868	± 0.007	1.750	1.750
80	3	3.516	3.492	± 0.008	1.875	1.875
100	4	4.518	4.491	± 0.009	2.000	2.250
150	6	6.647	6.614	± 0.011	3.000	3.000
200	8	8.655	8.610	± 0.015	4.000	4.000
250	10	10.780	10.735	± 0.015	5.000	5.000
300	12	12.780	12.735	± 0.015	6.000	6.000

# FLUID HANDLING CHARACTERISTICS OF ASTRAL CPVC PRO PIPES

## LINEAR FLUID FLOW VELOCITY

The linear velocity of a flowing fluid in a pipe is calculated from :

$$V = \frac{0.4085g}{d^2}$$

Where  $V$  = Linear fluid flow velocity in feet per second

$g$  = Flow rate in gallons per minute

$d$  = Inside diameter of pipe in inches

The values in the following tables are based on this formula. These values are accurate for all fluids.

Linear fluids flows velocity in a system should generally be limited to 5 ft/s, particularly for pipe size 6" and grater. Following this guideline will minimize risk of hydraulic shock damage due to water hammer surge pressures.

## FRICITION LOSS IN PIPES

A great advantage that Astral CPVC PRO Pipe enjoys over its metallic competitors is a smooth inner surface which is resistant to scaling and fouling. This means that friction pressure losses in the fluid flow are minimized from the beginning and do not significantly increase as the system ages, as can be the case with metal pipes subject to scaling and fouling.

The Hazen-Willims formula is the generally accepted method of calculating friction head losses in piping systems. The values in the following fluid tables are based on this formula and a surface roughness constants for other piping materials are given beside:

$$f = 0.2083 \times \left( \frac{100}{C} \right)^{1.852} \frac{g^{1.852}}{d^{4.8655}}$$

Where  $f$  = Friction head in feet of water per 100 feet of pipe

$d$  = Inside diameter of pipe in inches

$g$  = Flow rate in gallons per minute

$C$  = pipe surface roughness constant

## CONSTANT (C) TYPE OF PIPE

150	- CPVC pipe, new-40 years old
130-140	- steel / cast iron pipe, new
125	- steel pipe, old
120	- cast iron, 4 - 12 years old galvanized steel
100	- cast iron, 13 - 20 years old
60 - 80	- cast iron, worn / pitted

## FRICITION LOSS IN FITTINGS

Friction losses through fittings are calculated from the equivalent length of straight pipe which would produce the same friction loss in the fluid. The equivalent lengths of pipe for common fittings are given here.

Nominal Size (in.)	90° Standard Elbow (feet)	45° Standard Elbow (feet)	Standard Tee Run Flow (feet)	Standard Tee Branch Flow (feet)
1/2	1.55	0.83	1.04	3.11
3/4	2.06	1.10	1.37	4.12
1	2.62	1.40	1.75	5.25
1 1/4	3.45	1.84	2.30	6.90
1 1/2	4.03	2.15	2.68	8.05
2	5.17	2.76	3.45	10.30
2 1/2	6.10	3.30	4.10	12.20
3	7.60	4.10	5.10	15.20
4	10.00	5.30	6.70	20.00
6	15.10	8.00	10.10	30.20
8	19.90	10.60	13.20	39.70
10	24.90	13.30	16.60	49.90
12	29.70	15.90	19.80	59.40

## WATER HAMMER SURGE PRESSURE

Whenever the flow rate of fluid in a pipe is changing, there is a surge in pressure known as water hammer. The longer the line and the faster the fluid is moving, the greater the hydraulic shock will be. Water hammer may be caused by opening or closing a valve, starting or stopping a pump, or the movement of entrapped air through the pipe. The maximum water hammer surge pressure may be calculated from :

$$P_{wh} = \frac{p \Delta V}{g_c} \left[ \frac{p}{g_c} \left( 1 + \frac{d}{bE} \right) \right]^{1/2}$$

Where  $P_{wh}$  = Maximum surge pressure, psi

$p$  = Fluid density

$\Delta V$  = Change in fluid velocity

$g_c$  = Gravitational constant

$K$  = Bulk modulus of elasticity of fluid

$b$  = Pipe wall thickness

$E$  = Pipe material bulk modulus of elasticity

$d$  = Pipe inside diameter

The value in the following tables are based on this formula at 73°F and the assumption that water flowing at a given rate of gallons per minute is suddenly completely stopped. At 180°F, the surge pressure is approximately 15% less. The value for fluids other then water may be by multiplying by the square root of the fluid's specific gravity.

## THE WATER HAMMER SURGE PRESSURE PLUS THE SYSTEM OPERATING PRESSURE SHOULD NOT EXCEED THE RECOMMENDED WORKING PRESSURE RATING OF THE SYSTEM.

In order to minimize hydraulic shock due to water hammer, linear fluid flow velocity should generally be limited to 5ft/s. Velocity at system start-up should be limited to 1 ft/s during filling until it is certain that all air has been flushed from the system and pressure has been brought up to operating conditions. Pump should not be allowed to draw in air.

Where necessary, extra protective equipment may be used to prevent water hammer damage, such equipment might include pressure relief valves, shock absorbers, surge arrestors and vacuum air relief valves.

# FRICITION LOSS AND FLOW VELOCITY FOR SDR 11 CTC CPVC THERMOPLASTIC PIPE

(Friction head and Friction Loss are per 100 feet of pipe)

Gallons Per Minute	Flow Velocity (Feet Per Second)	Friction Head Loss (Ft. of Water Per 100 Ft.)	Friction Pressure Loss (PSI Per 100 Ft.)	1/2 in		3/4 in		1 in		1 1/4 in		1 1/2 in		2 in														
				1	2	3	4	5	6	7	8	9	10	15	20	25	30	35	40	45	50	55	60	70	80	90	100	125
1	1.71	3.19	1.38	0.80	0.50	0.22	0.48	0.15	0.06																			
2	3.42	11.53	5.00	1.60	1.82	0.79	0.96	0.53	0.23																			
3	5.16	24.43	10.59	2.40	3.85	1.67	1.44	1.12	0.49																			
4	6.83	41.62	18.04	3.20	6.55	2.84	1.93	1.91	0.83																			
5	8.54	62.91	27.27	4.00	9.91	4.29	2.41	2.89	1.25	1.61	1.09	0.47	1.16	0.49	0.21	0.68	0.13	0.06										
6	10.25	88.18	38.23	4.79	13.89	6.02	2.89	4.05	1.76																			
7	11.96	117.32	50.86	5.59	18.47	8.01	3.37	5.39	2.34																			
8	13.67	150.23	65.13	6.39	23.66	10.26	3.85	6.90	2.99																			
9	15.38	186.85	81.00	7.19	29.42	12.76	4.33	8.59	3.72																			
10	17.08	227.11	98.45	7.99	35.76	15.50	4.82	10.43	4.52	3.23	3.94	1.71	2.31	1.75	0.76	1.35	0.49	0.21										
15			11.99	75.78	32.85	7.22	22.11	9.58	4.84	8.35	3.62	3.47	3.71	1.61	2.03	1.03	0.45											
20			15.98	129.11	55.97	9.63	37.67	16.33	6.46	14.23	6.17	4.63	6.33	2.74	2.70	1.76	0.76											
25							12.04	56.94	24.69	8.07	21.51	9.33	5.78	9.56	4.15	3.38	2.66	1.15										
30							14.45	79.82	34.60	9.68	30.15	13.07	6.94	13.40	5.81	4.05	3.73	1.62										
35							16.86	106.19	46.03	11.30	40.11	17.39	8.09	17.83	7.73	4.73	4.96	2.15										
40									12.91	51.37	22.27	9.25	22.83	9.90	5.40	6.35	2.75											
45									14.52	63.89	27.70	10.41	28.40	12.31	6.08	7.89	3.42											
50									16.14	77.66	33.66	11.56	34.52	14.96	6.75	9.60	4.16											
55									17.75	92.65	40.16	12.72	41.18	17.85	7.43	11.45	4.96											
60												13.88	48.38	20.97	8.10	13.45	5.83											
70												16.19	64.37	27.90	9.46	17.89	7.76											
80																					10.61	22.91	9.93					
90																												
100																												
125																												

CAUTION: Flow velocity should not exceed 5 feet per second. Velocities in excess of 5 feet per second may result in system failure and property damage.

## CARRYING CAPACITY AND FRICTION LOSS FOR SCHEDULE 40 CPVC THERMOPLASTIC PIPE

(Independent variables : Gallons per minute and nominal pipe size O.D. • Dependent variables : Velocity, Friction head and pressure drop per 100 feet of pipe, interior smooth.)

Gallons Per Minute	3 in	4 in	6 in	8 in	10 in	12 in	2½ in	Maximum Surge Pressure (PSI)						
								1	3	5	7	9	10	12
1														
3														
5														
7														
9														
10	0.441	0.031	0.013	7.870										
12														
15	0.662	0.066	0.029	11.805										
20	0.883	0.113	0.049	15.740	0.511	0.030	0.013	8.420						
25	1.103	0.170	0.074	19.675	0.639	0.045	0.019	10.525						
30	1.324	0.238	0.103	23.610	0.767	0.063	0.027	12.630						
35	1.545	0.317	0.137	27.545	0.894	0.084	0.036	14.735						
40	1.766	0.406	0.176	31.480	1.022	0.107	0.046	16.840						
45	1.986	0.505	0.218	35.415	1.150	0.134	0.058	18.945						
50	2.207	0.614	0.265	39.350	1.278	0.162	0.070	21.050						
60	2.648	0.861	0.372	47.220	1.533	0.228	0.098	25.260						
70	3.090	1.145	0.495	55.090	1.789	0.303	0.131	29.470						
80	3.531	1.486	0.634	62.960	2.044	0.388	0.168	33.680						
90	3.973	1.824	0.755	70.830	2.300	0.483	0.209	37.890						
100	4.414	2.217	0.958	78.700	2.555	0.587	0.254	42.100						
125	5.517	3.351	1.449	98.375	3.194	0.887	0.383	52.625						
150	6.621	4.699	2.031	118.050	3.833	1.243	0.537	63.150						
175	7.724	6.250	2.701	137.725	4.472	1.654	0.715	73.675						
200	8.828	8.003	3.459	157.400	5.111	2.117	0.915	84.200						
250					6.389	3.201	1.384	105.250						
300					7.666	4.487	1.939	126.300						
350					8.944	5.969	2.580	147.350						
400														
450														
500														
750														
1000														
1250														
1500														
1750														

CAUTION : Flow velocity should not exceed 5 feed per second. • CPVC pipe can not be used for compressed air service.

## CARRYING CAPACITY AND FRICTION LOSS FOR SCHEDULE 80 CPVC THERMOPLASTIC PIPE

(Independent variables: Gallons per minute and nominal pipe size O.D. • Dependent variables: Velocity, Friction head and pressure drop per 100 feet of pipe, interior smooth.)


Gallons Per Minute	3 in	4 in	6 in	8 in	10 in	12 in	2½ in	Maximum Surge Pressure (PSI)		
								1	3	5
1										
3										
5										
7										
9										
10	0.498	0.042	0.018	10.500						
12	0.747	0.089	0.038	15.750						
15	0.996	0.151	0.065	21.000	0.570	0.039	0.017	11.220		
20	2.245	0.228	0.099	26.250	0.712	0.059	0.025	14.025		
30	3.044	0.320	0.138	31.500	0.855	0.082	0.036	16.830		
35	3.743	0.425	0.184	36.750	0.997	0.109	0.047	19.635		
40	4.992	0.545	1.235	42.000	1.140	0.140	0.061	22.440		
45	5.249	0.678	0.293	47.250	1.282	0.174	0.075	25.245		
50	5.249	0.823	0.356	52.500	1.425	0.212	0.092	28.050	0.627	0.029
60	6.298	1.154	0.499	63.000	1.710	0.297	0.128	33.660	0.752	0.040
70	7.486	1.536	0.664	73.500	1.995	0.395	0.171	39.270	0.877	0.054
80	8.394	1.968	0.850	84.000	2.280	0.506	0.219	44.880	1.003	0.069
90	9.482	2.446	1.057	94.500	2.565	0.629	0.272	50.490	1.128	0.085
100	9.980	2.973	1.285	105.000	2.850	0.765	0.330	56.100	1.253	0.104
125	6.225	4.494	1.943	131.250	3.562	1.156	0.500	70.125	1.567	0.157
150	7.469	6.299	2.723	157.500	4.274	1.620	0.700	84.150	1.880	0.220
175	8.714	8.381	3.622	183.750	4.987	2.155	0.932	98.175	2.193	0.292
200	9.959	10.732	4.639	210.000	5.699	2.760	1.193	112.200	2.560	0.374
250	7.124	4.173	1.804	140.250	3.133	0.566	0.244	57.500	1.784	0.144
300	8.549	5.849	2.528	168.300	3.760	0.793	0.343	69.000	2.141	0.202
350	9.974	7.781	3.363	196.350	4.386	1.055	0.456	80.500	2.498	0.268
400					5.013	1.351	0.584	92.000	2.855	0.343
450					5.639	1.680	0.728	103.500	3.212	0.427
500					6.266	2.042	0.883	115.000	3.589	0.519
750					9.399	4.327	1.870	172.500	5.353	1.100
1000								7.137	1.874	0.810
1250								8.921	2.833	1.224
1500								10.706	3.970	1.716
1750										
2000										

CAUTION: Flow velocity should not exceed 5 feed per second. • CPVC pipe can not be used for compressed air service.

# THERMAL EXPANSION AND CONTRACTION

Like all piping material, Astral CPVC PRO expands when heated and contracts when cooled. CPVC piping (regardless of pipe diameter) will expand about 1 inch per 50 feet of length when subjected to a 50° F temperature increase, therefore, allowances must be made for this resulting movement. However, laboratory testing and installation experience have demonstrated that the practical issues are much smaller than the coefficient of thermal expansion would suggest. The stresses developed in CPVC pipe are generally much smaller than those developed in metal pipe for equal temperature changes because of the difference in elastic modulus. Required loops are smaller than those recommended by the Copper Development Association for copper systems. Expansion is mainly a concern in hot water lines. Generally, thermal expansion can be accommodated with changes in direction.

However, a long straight run may require an offset or loop. Only one expansion loop, properly sized is required in any single straight run, regardless of its total length. If more convenient, two or more smaller expansion loops, properly sized, can be utilized in a single run of pipe to accommodate the thermal movement. Be sure to hang pipe with smooth straps that will not restrict movement. For convenience, loop (or offset) length have been calculated for different pipe sizes and different run length with a temperature increase (DT) of about 80°F. The results, shown in Tables A and B, are presented simply as a handy guide for quick and easy determinations of acceptable loop length for the approximate conditions. Loop length for other temperatures and run length can be calculated utilizing the following equations :

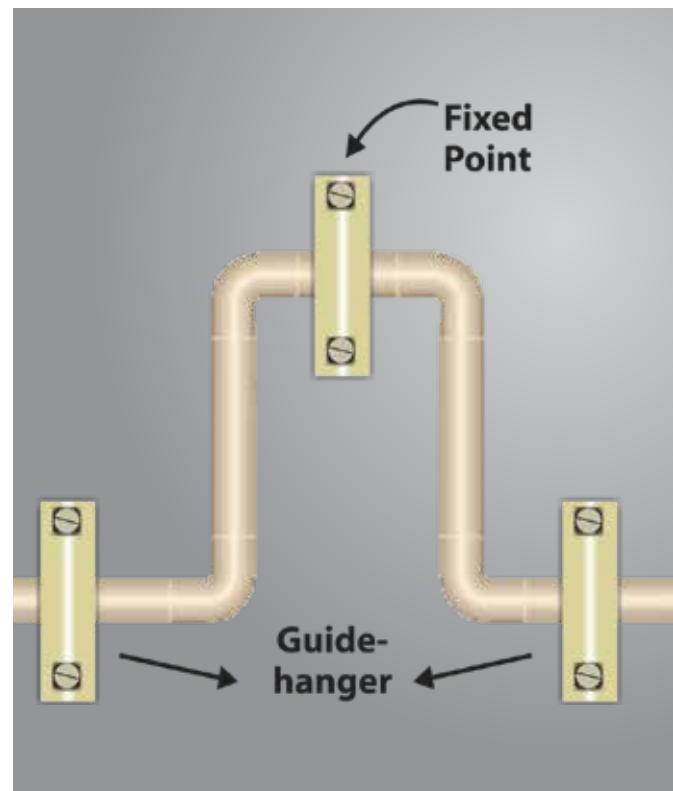

## EXPANSION LOOP FORMULA

$$L = \sqrt{\frac{3 ED (\Delta L)}{2S}}$$

Where:

L = Loop Length (in.)  
E = Modulus of elasticity at maximum temperature (psi)  
S = Working stress at maximum temperature (psi)  
D = Outside diameter of pipe (in.)

$\Delta L$  = Change in length due to change in temperature (in.)




## THERMAL EXPANSION FORMULA

$$\Delta L = L_p C \Delta T$$

Where:


$\Delta L$  = Change in length due to change temperature (in.)  
L<sub>p</sub> = Length of pipe (in.)  
C = Coefficient of thermal expansion (in./in./°F)  
=  $3.4 \times 10^{-5}$  in./in./°F for CPVC  
 $\Delta T$  = Change in temperature (°F)

# THERMAL EXPANSION AND CONTRACTION

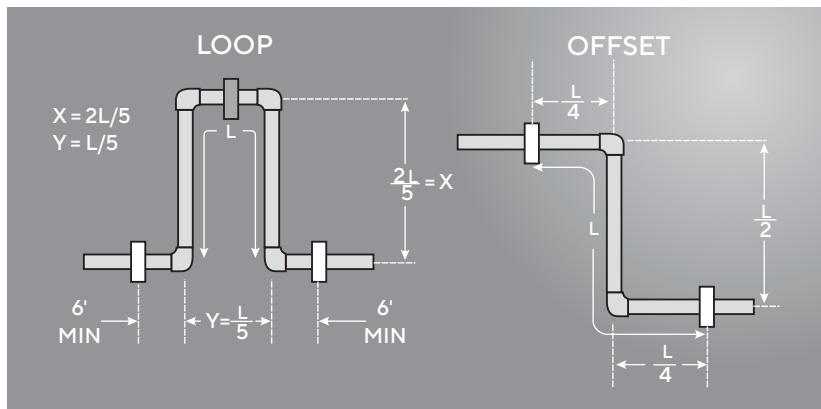

**Modulus of Elasticity and Working Stress For CPVC**


Temperature		Modulus, E(psi)	Stress, S(psi)
°F	°C		
73	(27)	423,000	2000
90	(32)	403,000	1800
110	(43)	371,000	1500
120	(49)	355,000	1300
140	(60)	323,000	1000
160	(71)	291,000	750
180	(82)	269,000	500

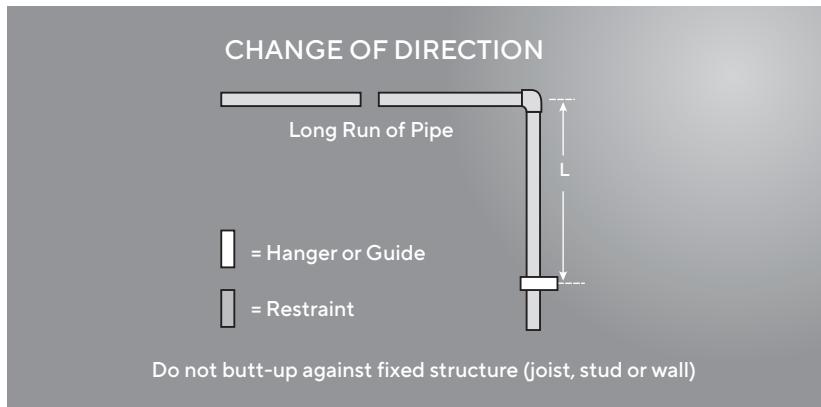

**TABLE A**

ASTRAL CPVC PRO pipe CTS PIPES  
(ASTM D 2846)  
Calculated Loop (Offset) Length with  
ΔT of approx. 80°F in inches

Nominal Size	mm	Length of Run Feet			
		40	60	80	100
15	½	22	27	31	34
20	¾	26	32	36	41
25	1	29	36	41	46
32	1¼	32	40	46	51
40	1½	35	43	50	56
50	2	40	49	57	64

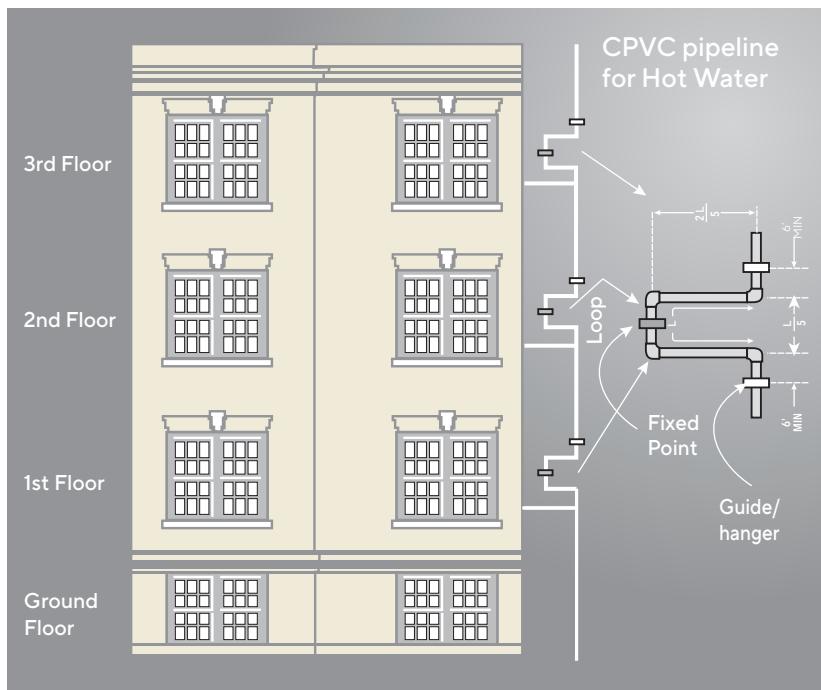

**TABLE B**

ASTRAL CPVC PRO IPS PIPES  
(ASTM F 441)  
Calculated Loop (Offset) Length with  
ΔT of approx. 80°F in inches

Nominal Size	cm	Length of Run Feet			
		40	60	80	100
65	2½	47	57	66	74
75	3	52	63	73	82
100	4	58	72	83	92
150	6	71	87	100	112
200	8	81	99	114	128
250	10	90	111	128	143
300	12	98	121	139	156

# HORIZONTAL & VERTICAL SUPPORTS

Horizontal & Vertical runs of Astral CPVC PRO Pipe should be supported by pipe clamps or by hangers located on the horizontal connection close to the Riser. Hangers should not have rough or sharp edges, which come in contact with the pipe.

SPACING									
Nominal Pipe Size		21°C (70°F)		49°C (120°F)		71°C (160°F)		82°C (180°F)	
mm	in.	Ft.	(cm)	Ft.	(cm)	Ft.	(cm)	Ft.	(cm)
15	½	5.5	(167.70)	4.5	(137.16)	3.0	(91.44)	2.5	(76.20)
20	¾	5.5	(167.70)	5.0	(152.40)	3.0	(91.44)	2.5	(76.20)
25	1	6.0	(182.88)	5.5	(167.70)	3.5	(106.68)	3.5	(91.44)
32	1¼	6.5	(198.12)	6.0	(182.88)	3.5	(106.68)	3.5	(106.68)
40	1½	7.0	(213.36)	6.0	(182.88)	3.5	(106.68)	3.5	(106.68)
50	2	7.0	(213.36)	6.5	(198.12)	4.0	(121.92)	3.5	(106.68)
65	2½	8.0	(244.00)	7.5	(228.60)	4.5	(137.16)	4.0	(121.92)
80	3	8.0	(244.00)	7.5	(228.60)	4.5	(137.16)	4.0	(121.92)
100	4	9.0	(274.32)	8.5	(259.08)	5.0	(152.40)	4.5	(137.16)
150	6	10.0	(304.80)	9.0	(274.32)	5.5	(167.07)	5.0	(152.40)
200	8	11.0	(335.28)	10.0	(304.80)	6.0	(182.88)	5.5	(167.07)
250	10	11.5	(350.52)	10.5	(320.04)	6.5	(198.12)	6.0	(182.88)
300	12	12.5	(381.00)	11.0	(335.28)	7.5	(228.60)	6.5	(198.12)

Note: Above values are typical values. It should be used as a general recommendation. Do not consider as a specification.

BAND HANGER



ANCHOR STRAP



PIPE CLAMP



U-BOLT



**ASTRAL**  
**Clamps & Hangers**

SUPPORT SYSTEM FOR PIPES AND FITTINGS




# UNDERGROUND INSTALLATION

## TRENCHING

The following trenching and burial procedures should be used to protect the piping system.

1. The trench should be excavated to ensure the sides will be stable under all working conditions.
2. The trench should be wide enough to provide adequate room for the following :
  - A. Joining the pipe in the trench.
  - B. Snaking the pipe from side or side to compensate for expansion and contraction.
  - C. Filling and compacting the side fills. The space between the pipe and trench wall must be wider than the compaction equipment used in the compaction of the back fill. Minimum width shall not be less than the greater of either the pipe outside diameter plus 16 inches or the pipe outside diameter times 1.25 plus 12 inches. Trench width may be different if approved by the design engineer.
3. The trench bottom should be smooth, free of rocks and debris, continuous and provide uniform support. If ledge rock, hardpan or large boulders are encountered, the trench bottom should be padded with bedding of compacted granular material to a thickness of at least 4 inches. Foundation bedding should be installed as required by the engineer.
4. Trench depth is determined by the pipe's service requirements. Plastic pipe should always be installed at least below the frost level. The minimum cover for lines subject to heavy overhead traffic is 24 inches.
5. A smooth trench bottom is necessary to support the pipe over its entire length on firm stable material. Blocking should not be used to change pipe grade or to intermittently support pipe over low sections in the trench.

CPVC pipes and fittings can be installed underground. Since these piping systems are flexible systems, proper attention should be given to burial conditions. The stiffness of the piping system is affected by sidewall support, soil compaction, and the condition of the trench. Trench bottoms should be smooth and regular in either undisturbed soil or a layer of compacted backfill. Pipe must lie evenly on this surface throughout the entire length of its barrel. Excavation, bedding and backfill should be in accordance with the provision of the local Plumbing Code having jurisdiction.

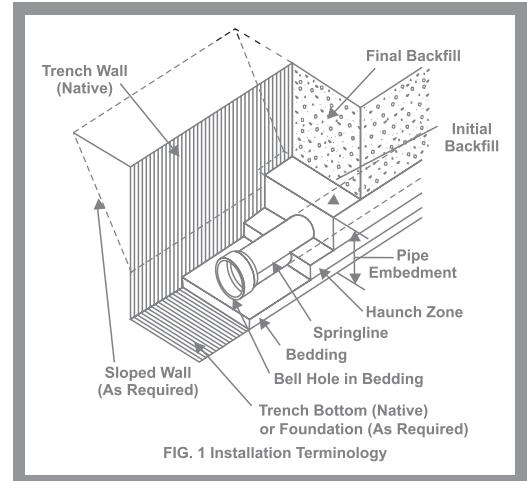

## BEDDING AND BACKFILLING

1. Even though sub-soil conditions vary widely from place to place, the pipe backfill should be stable and provide protection for the pipe.
2. The pipe should be surrounded with a granular material which is easily worked around the sides of the pipe. Backfilling should be performed in layer of 6 inch with each layer being sufficiently compacted to 85% to 95% compaction.
3. A mechanical tamper is recommended for compacting sand and gravel backfill which contain a significant proportion of fine grained material, such as silt and clay. If a tamper is not available, compacting should be done by hand.
4. The trench should be completely filled. The backfill should be placed and spread in fairly uniform layers to prevent any unfilled spaces or voids.

# REQUIREMENT OF THERMALLY INSULATED CPVC PIPE

CPVC has much lower thermal conductivity than metals used in piping systems (0.14W / mK for CPVC versus > 400 W / mK for copper).

For this reason in most cases it is not necessary to thermally insulate CPVC piping. However the equation below can be used to calculate the approximate heat loss from CPVC pipes 1 meter length of pipe.

$$Q = \frac{\lambda}{e} \pi \left[ \frac{di + do}{2} \right] \cdot \Delta T$$

Where  $Q$  = Heat loss per meter of pipe, W/m  
 $\lambda$  = Thermal conductivity. [W/mK] for CPVC,  $\lambda = 0.14$  W/mK  
 $e$  = Thickness of pipe, mm  
 $\pi = 3.1416$   
 $di$  = Inside diameter, mm  
 $do$  = Outside diameter, mm  
 $\Delta T$  = Temperature differential between inner and outer surface of pipe.  
This can be approximated to:  $T_{\text{water}} - T_{\text{ambient}}$  (K)

## EXAMPLE

What is the heat loss/meter from a 20mm outside diameter CPVC pipe. wall thickness 2.3mm, with water flowing inside at 80°C and an ambient air temperature of 25°C?

$$Q = \frac{0.14}{2.3} \cdot 3.1416 \left[ \frac{15.4 + 20}{2} \right] \cdot (80 - 25)$$
$$= 186 \text{ W/m}$$

$$Q = K \Delta T$$

Equation (1) can be simplified for standard pipe dimensions to:

Where  $K$  is a conductivity of CPVC and the pipe geometry in the previous example.  $do = 20\text{mm}$ , and  $e = 2.3\text{mm}$

$$Q = \frac{0.14}{2.3} \cdot 3.1416 \left[ \frac{15.4 + 20}{2} \right] = 3.38 \text{ (W/m)}$$

## HANDLING

The pipe should be handled with reasonable care because thermoplastic pipe is much lighter in weight than metal pipe, there is sometimes a tendency to throw it around. This should be avoided.

The pipe should never be dragged or pushed from a truck bed. Pallets for pipe should be removed with a fork lift. Loose pipe can be rolled down timbers as long as the pieces do not fall on each other or on any hard or uneven surface. In all cases, severe contact with any sharp objects (rocks, angle irons, forks on forklifts, etc.) should be avoided.


## STORAGE

If possible, pipe should be stored inside. When this is not possible, the pipe should be stored on level ground which is dry and free from sharp objects. If different schedules of pipes are stacked together, the pipes with the thickest walls should be at the bottom.

The pipes should be protected from the sun and be in an area with proper ventilation. This will lessen the effects of ultraviolet rays and help prevent heat built-up.

If the pipes are stored in racks, it should be continuously supported along its length. If this is not possible, the spacing of the supports should not exceed three feet (3').

When storage temperatures are below 0°C (32°F), extra care should be taken when handling the pipe. This will help prevent any problems which could be caused by the slightly lower impact strength of PVC pipes at temperature below freezing.

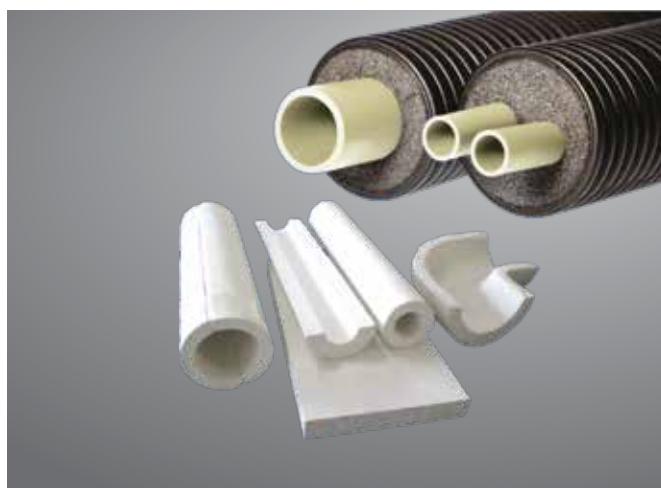

# PRODUCT



ASTRAL  
**CPVC** PRO®

# RANGE

# CPVC PRO PIPE & FITTINGS

## CTS - COPPER TUBE SIZE AS PER ASTM D2846



IS:15778



Only those products bearing the above marks are certified



**PIPE SDR-11  
(3 MTR. LENGTH)**

Size (cm)	Size (inch)	Product Code	Std. Pkg. (Nos.)
1.5	1/2	M511110301	100
2.0	3/4	M511110302	50
2.5	1	M511110303	30
3.2	1 1/4	M511110304	20
4.0	1 1/2	M511110305	15
5.0	2	M511110306	08



**PIPE SDR -13.5  
(3 MTR. LENGTH)**

Size (cm)	Size (inch)	Product Code	Std. Pkg. (Nos.)
1.5	1/2	M511130301	100
2.0	3/4	M511130302	50
2.5	1	M511130303	30
3.2	1 1/4	M511130304	20
4.0	1 1/2	M511130305	15
5.0	2	M511130306	08



**PIPE SDR-11  
(5 MTR. LENGTH)**

Size (cm)	Size (inch)	Product Code	Std. Pkg. (Nos.)
1.5	1/2	M511110501	60
2.0	3/4	M511110502	40
2.5	1	M511110503	25
3.2	1 1/4	M511110504	15
4.0	1 1/2	M511110505	10
5.0	2	M511110506	06



**PIPE SDR -13.5  
(5 MTR. LENGTH)**

Size (cm)	Size (inch)	Product Code	Std. Pkg. (Nos.)
1.5	1/2	M511130501	60
2.0	3/4	M511130502	40
2.5	1	M511130503	25
3.2	1 1/4	M511130504	15
4.0	1 1/2	M511130505	10
5.0	2	M511130506	06

# CPVC PRO PIPE & FITTINGS

## IPS - IRON PIPE SIZE AS PER ASTM F441



**PIPE  
SCHEDULE 40  
(3 MTR. LENGTH)**



**PIPE  
SCHEDULE 80  
(3 MTR. LENGTH)**

Size (cm)	Size (inch)	Product Code	Std. Pkg. (Nos.)
6.5	2½	M511400307	05
8.0	3	M511400308	03
10.0	4	M511400309	02
15.0	6	M511400310	01

Size (cm)	Size (inch)	Product Code	Std. Pkg. (Nos.)
6.5	2½	M511800307	05
8.0	3	M511800308	03
10.0	4	M511800309	02
15.0	6	M511800310	01
20.0	8	M511800311	01

10" and 12" pipe sizes are available on request



**PIPE  
SCHEDULE 40  
(5 MTR. LENGTH)**



**PIPE  
SCHEDULE 80  
(5 MTR. LENGTH)**

Size (cm)	Size (inch)	Product Code	Std. Pkg. (Nos.)
6.5	2½	M511400507	05
8.0	3	M511400508	03
10.0	4	M511400509	02
15.0	6	M511400510	01

Size (cm)	Size (inch)	Product Code	Std. Pkg. (Nos.)
6.5	2½	M511800507	05
8.0	3	M511800508	03
10.0	4	M511800509	02
15.0	6	M511800510	01
20.0	8	M511800511	01

10" and 12" pipe sizes are available on request

# CPVC PRO PIPE & FITTINGS

## CTS - AS PER ASTM D2846




Only those products bearing the above marks are certified

ASTRAL  
**CPVC PRO**




**COUPLER-SOC**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
1.5	1/2	M512111001	100	1500
2.0	3/4	M512111002	100	600
2.5	1	M512111003	50	600
3.2	1 1/4	M512111004	10	300
4.0	1 1/2	M512111005	10	200
5.0	2	M512111006	10	50




**ELBOW 45°-SOC**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
1.5	1/2	M512112301	100	500
2.0	3/4	M512112302	100	200
2.5	1	M512112303	50	250
3.2	1 1/4	M512112304	10	60
4.0	1 1/2	M512112305	10	40
5.0	2	M512112306	05	15



**ELBOW 90°-SOC**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
1.5	1/2	M512110501	100	1000
2.0	3/4	M512110502	50	800
2.5	1	M512110503	50	400
3.2	1 1/4	M512110504	10	200
4.0	1 1/2	M512110505	10	120
5.0	2	M512110506	05	50



**TEE-SOC**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
1.5	1/2	M512110101	100	800
2.0	3/4	M512110102	50	500
2.5	1	M512110103	25	300
3.2	1 1/4	M512110104	10	150
4.0	1 1/2	M512110105	10	90
5.0	2	M512110106	05	40




**END CAP-SOC**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
1.5	1/2	M512114101	100	1000
2.0	3/4	M512114102	100	500
2.5	1	M512114103	100	200
3.2	1 1/4	M512114104	10	120
4.0	1 1/2	M512114105	10	100
5.0	2	M512114106	10	40



**CROSS-SOC**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
1.5	1/2	M512112401	100	200
2.0	3/4	M512112402	25	100
2.5	1	M512112403	25	100

# CPVC PRO PIPE & FITTINGS


## CTS - AS PER ASTM D2846



Only those products bearing the above marks are certified



**MALE ADAPTOR  
(CPVC THREADS)**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
1.5	1/2	M512111301	100	600
2.0	3/4	M512111302	100	600
2.5	1	M512111303	50	300
3.2	1 1/4	M512111304	10	200
4.0	1 1/2	M512111305	10	100
5.0	2	M512111306	10	50




**REDUCER  
FEMALE ADAPTOR  
(CPVC THREADS)**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0 x 1.5	3/4 x 1/2	M512111614	50	600



**REDUCER MALE  
ADAPTOR  
(CPVC THREADS)**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0 x 1.5	3/4 x 1/2	M512111314	100	500
2.5 x 2.0	1 x 3/4	M512111316	50	450




**FEMALE ADAPTOR  
(CPVC THREADS)**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
1.5	1/2	M512111601	100	800
2.0	3/4	M512111602	50	500
2.5	1	M512111603	50	250
3.2	1 1/4	M512111604	10	150
4.0	1 1/2	M512111605	10	100
5.0	2	M512111606	05	50




**UNION-SOC**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
1.5	1/2	M512112601	30	210
2.0	3/4	M512112602	20	180
2.5	1	M512112603	15	120
3.2	1 1/4	M512112604	10	90
4.0	1 1/2	M512112605	10	60
5.0	2	M512112606	05	30




**TANK ADAPTOR  
(THDxTHD)**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
1.5	1/2	M512112501	10	80
2.0	3/4	M512112502	10	60
2.5	1	M512112503	10	40
3.2	1 1/4	M512112504	10	30
4.0	1 1/2	M512112505	10	20
5.0	2	M512112506	05	15



**TANK ADAPTOR  
(SOCKET TYPE)  
(THDxSOC)**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0	3/4	M5128010202	25	75
2.5	1	M5128010203	20	60
3.2	1 1/4	M5128010204	10	70
4.0	1 1/2	M5128010205	10	60
5.0	2	M5128010206	05	35




**TANK ADAPTOR  
(SPIGOT TYPE)  
(THDxSPG)**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
1.5	1/2	M512806501	25	200
2.0	3/4	M512806502	20	140
2.5	1	M512806503	20	80
3.2	1 1/4	M512806504	10.	40
4.0	1 1/2	M512806505	05	30
5.0	2	M512806506	05	20




**REDUCER  
ELBOW 90°-SOC**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0 x 1.5	3/4 x 1/2	M512110614	100	500
2.5 x 1.5	1 x 1/2	M512110615	50	350
2.5 x 2.0	1 x 3/4	M512110616	50	300
3.2 x 1.5	1 1/4 x 1/2	A512110617*	-	01
3.2 x 2.0	1 1/4 x 3/4	M512110618	25	175
3.2 x 2.5	1 1/4 x 1	M512110619	25	150
5.0 x 2.5	2 x 1	A512110626*	-	01



**REDUCER TEE  
-SOC**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
1.5 x 1.5 x 2.0	1/2 x 1/2 x 3/4	A512110291*	-	01
2.0 x 1.5 x 2.0	3/4 x 1/2 x 3/4	A512110292*	-	01
2.0 x 1.5 x 1.5	3/4 x 1/2 x 1/2	A512110293*	-	01
2.0 x 2.0 x 1.5	3/4 x 3/4 x 1/2	M512110214	50	300
2.5 x 2.5 x 1.5	1 x 1 x 1/2	M512110215	25	300
2.5 x 2.5 x 2.0	1 x 1 x 3/4	M512110216	25	75
3.2 x 3.2 x 1.5	1 1/4 x 1 1/4 x 1/2	M512110217	10	100
3.2 x 3.2 x 2.0	1 1/4 x 1 1/4 x 3/4	M512110218	10	120
3.2 x 3.2 x 2.5	1 1/4 x 1 1/4 x 1	M512110219	10	80
4.0 x 4.0 x 1.5	1 1/2 x 1 1/2 x 1/2	M512110220	10	70
4.0 x 4.0 x 2.0	1 1/2 x 1 1/2 x 3/4	M512110221	10	60
4.0 x 4.0 x 2.5	1 1/2 x 1 1/2 x 1	M512110222	10	30
4.0 x 4.0 x 3.2	1 1/2 x 1 1/2 x 1 1/4	M512110223	10	60
5.0 x 5.0 x 1.5	2 x 2 x 1/2	M512110224	05	30
5.0 x 5.0 x 2.0	2 x 2 x 3/4	M512110225	05	35
5.0 x 5.0 x 2.5	2 x 2 x 1	M512110226	05	15
5.0 x 5.0 x 3.2	2 x 2 x 1 1/4	M512110227	05	30
5.0 x 5.0 x 4.0	2 x 2 x 1 1/2	M512110228	05	25



**REDUCER TEE  
(IPS X CTS)**


Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
6.5 x 2.5	2 1/2 x 1	A5121110031*	-	01
6.5 x 4.0	2 1/2 x 1 1/2	M5121110033	-	15
6.5 x 5.0	2 1/2 x 2	M5121110034	-	12
8.0 x 2.5	3 x 1	A5121110037*	-	01
8.0 x 4.0	3 x 1 1/2	M5121110039	-	10
8.0 x 5.0	3 x 2	M5121110040	-	10
10.0 x 4.0	4 x 1 1/2	M5121110046	-	05
10.0 x 5.0	4 x 2	M5121110047	-	05
15.0 x 5.0	6 x 2	A5121110055*	-	01

# CPVC PRO PIPE & FITTINGS

## CTS - AS PER ASTM D2846



**REDUCER  
BUSHING  
(SPG x SOC)**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0 x 1.5	¾ x ½	M512111914	100	1000
2.5 x 1.5	1 x ½	M512111915	100	600
2.5 x 2.0	1 x ¾	M512111916	100	800
3.2 x 1.5	1¼ x ½	M512111917	10	300
3.2 x 2.0	1¼ x ¾	M512111918	10	300
3.2 x 2.5	1¼ x 1	M512111919	10	300
4.0 x 1.5	1½ x ½	M512111920	10	200
4.0 x 2.0	1½ x ¾	M512111921	10	200
4.0 x 2.5	1½ x 1	M512111922	10	200
4.0 x 3.2	1½ x 1¼	M512111923	10	200
5.0 x 1.5	2 x ½	M512111924	10	100
5.0 x 2.0	2 x ¾	M512111925	10	150
5.0 x 2.5	2 x 1	M512111926	10	100
5.0 x 3.2	2 x 1¼	M512111927	10	100
5.0 x 4.0	2 x 1½	M512111928	10	100



**TRANSITION  
BUSHING  
(IPS X CTS)**




Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
1.5 x 1.5	½ x ½	M512112101	100	1500
2.0 x 2.0	¾ x ¾	M512112102	100	1000
2.5 x 2.5	1 x 1	M512112103	50	200
3.2 x 3.2	1¼ x 1¼	M512112104	25	150
4.0 x 4.0	1½ x 1½	M512112105	10	80
5.0 x 5.0	2 x 2	M512112106	10	50



**REDUCER  
COUPLER**



**TRANSITION  
BUSHING  
(IPS X CTS)**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
6.5 X 2.5	2½ x 1	A512112131*	-	01
6.5 x 4.0	2½ x 1½	M512112133	-	01
6.5 x 5.0	2½ x 2	M512112134	05	25
8.0 x 4.0	3 x 1½	M512112139	-	01
10.0 x 4.0	4 x 1½	M512112146	-	01
8.0 x 5.0	3 x 2	M512112140	05	20
10.0 x 5.0	4 x 2	M512112147	-	10

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0 x 1.5	¾ x ½	M512111114	100	1000
2.5 x 1.5	1 x ½	M512111115	100	500
2.5 x 2.0	1 x ¾	M512111116	50	450
3.2 x 1.5	1¼ x ½	M512111117	50	300
3.2 x 2.0	1¼ x ¾	M512111118	50	300
3.2 x 2.5	1¼ x 1	M512111119	50	200
4.0 x 1.5	1½ x ½	M512111120	25	75
4.0 x 2.0	1½ x ¾	M512111121	25	75
4.0 x 2.5	1½ x 1	M512111122	25	75
4.0 x 3.2	1½ x 1¼	M512111123	25	50
5.0 x 1.5	2 x ½	M512111124	10	40
5.0 x 2.0	2 x ¾	M512111125	10	90
5.0 x 2.5	2 x 1	M512111126	10	30
5.0 x 3.2	2 x 1¼	M512111127	10	30
5.0 x 4.0	2 x 1½	M512111128	10	70

\* Reducer fittings are professionally assembled using ASTRAL fittings and bushings. Quantity as per order.  
Note: Fabricated reducer fittings are not eligible for return to the manufacturer. SOC - SOCKET, SPG - SPIGOT  
All the items where product code starts with 'A' are assembled items.



Only those products bearing the above marks are certified

ASTRAL  
**CPVC PRO**<sup>®</sup>



**REDUCER COUPLER-SOC**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
6.5 x 4.0	2 1/2 x 1 1/2	A5121110333*	-	01
6.5 x 5.0	2 1/2 x 2	A5121110334*	-	01




**ELBOW 90° 4-WAY**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0	3/4	M5121112502	50	250




**TRANSITION COUPLER (IPS X CTS)**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0 x 2.0	3/4 x 3/4	M512112202*	-	100
2.5 x 2.5	1 x 1	M512112203	50	200



**BRASS FPT ELBOW 90°**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
1.5 x 1.5	1/2 x 1/2	M512110701	50	200
2.0 x 1.5	3/4 x 1/2	M512110714	50	150
2.0 x 2.0	3/4 x 3/4	M512110702	25	100
2.5 x 1.5	1 x 1/2	M512110715	25	100
2.5 x 2.0	1 x 3/4	M512110716	25	100
2.5 x 2.5	1 x 1	M512110703	25	50
3.2 x 1.5	1 1/4 x 1/2	M512110517	25	75
3.2 x 2.0	1 1/4 x 3/4	M512110518	30	60
3.2 x 3.2	1 1/4 x 1 1/4	M512110704	10	30




**SSR ELBOW 90°**



Size (cm)	Size (inch)	Product Code	Std.	Pkg.(Nos.)
1.5 x 1.5	1/2 x 1/2	M512117501	200	
2.0 x 1.5	3/4 x 1/2	M512117514	150	



**FEMALE EXT. BRASS ELBOW 90°**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0 x 1.5	3/4 x 1/2	M512114723	25	100



**ELBOW 90° 3-WAY**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0	3/4	M5121112402	50	300



**BRASS ELBOW WITH CLAMP**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0 x 1.5	3/4 x 1/2	M5121114114	10	250

# CPVC PRO PIPE & FITTINGS

## CTS - AS PER ASTM D2846




**MALE BRASS  
ELBOW 90°**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0 x 1.5	3/4 x 1/2	M512114823	10	100




**MALE ADAPTOR  
(BRASS THREADS)**




Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
1.5	1/2	M512111401	50	200
2.0	3/4	M512111402	25	100
2.5	1	M512111403	10	50
3.2	1 1/4	M512111404	5	25
4.0	1 1/2	M512111405	5	25
5.0	2	M512111406	5	15




**BRASS FPT TEE**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
1.5 x 1.5 x 1.5	1/2 x 1/2 x 1/2	M512110301	50	200
2.0 x 2.0 x 1.5	3/4 x 3/4 x 1/2	M512110314	25	100
2.0 x 2.0 x 2.0	3/4 x 3/4 x 3/4	M512110302	25	100
2.5 x 2.5 x 1.5	1 x 1 x 1/2	M512110315	25	75
2.5 x 2.5 x 2.0	1 x 1 x 3/4	M512110316	25	75
2.5 x 2.5 x 2.5	1 x 1 x 1	M512110303	10	50
3.2 x 3.2 x 3.2	1 1/4 x 1 1/4 x 1 1/4	M512110304	05	30
3.2 x 3.2 x 1.5	1 1/4 x 1 1/4 x 1/2	M512110317	10	40

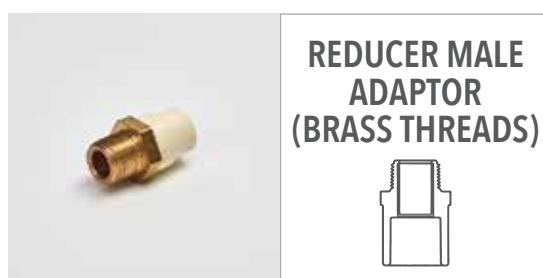


**REDUCER MALE  
ADAPTOR  
(BRASS THREADS)**




Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0 x 1.5	3/4 x 1/2	M512111514	25	150
2.5 x 1.5	1 x 1/2	M512111515	25	100
2.5 x 2.0	1 x 3/4	M512111416	25	125




**MALE BRASS  
TEE**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0 x 2.0 x 1.5	3/4 x 3/4 x 1/2	M512114923	10	100
2.5 x 2.5 x 1.5	1 x 1 x 1/2	M512115024	-	75

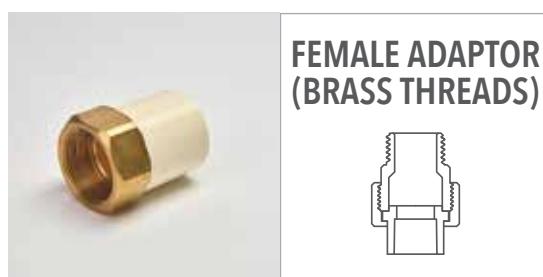

**FEMALE ADAPTOR  
(BRASS THREADS)**




Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
1.5	1/2	M512111701	50	200
2.0	3/4	M512111702	25	100
2.5	1	M512111703	10	50
3.2	1 1/4	M512111704	5	25
4.0	1 1/2	M512111705	5	25
5.0	2	M512111706	5	15



Only those products bearing the above marks are certified


ASTRAL  
**CPVC PRO**

### REDUCER BRASS COUPLER




Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0 x 1.5	3/4 x 1/2	M512111214	50	200
2.5 x 1.5	1 x 1/2	M512111215	25	100
2.5 x 2.0	1 x 3/4	M512111216	25	125

### CONCEALED VALVE (CHROME PLATED) (TRIANGLE)




Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
1.5	1/2	M5121118501	01	20
2.0	3/4	M5121118502	02	16
2.5	1	M5121118503	02	14

### MALE BRASS UNION




Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
1.5	1/2	M5121119801	25	200
2.0	3/4	M5121119802	10	100
2.5	1	M5121119803	10	60
3.2	1 1/4	M5121119804	5	35
4.0	1 1/2	M5121119805	5	25
5.0	2	M5121119806	5	15

### CONCEALED VALVE (CHROME PLATED) (SQUARE)




Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
1.5	1/2	M5121110401#	-	01
2.0	3/4	M5121110402#	-	01
2.5	1	M5121110403#	-	01

### FEMALE BRASS UNION



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
1.5	1/2	M5121119901	25	200
2.0	3/4	M5121119902	10	110
2.5	1	M5121119903	10	70
3.2	1 1/4	M5121119904	5	35
4.0	1 1/2	M5121119905	5	25
5.0	2	M5121119906	5	15

### CONCEALED VALVE (CHROME PLATED) (ROUND)




Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
1.5	1/2	M5121110501#	-	01
2.0	3/4	M5121110502	01	01
2.5	1	M5121110503#	-	01

# CPVC PRO PIPE & FITTINGS

## SPARES FOR CONCEALED VALVE



**CONCEALED VALVE  
(CHROME PLATED)  
(FLOWER)**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
1.5	1/2	M5121110601#	-	01
2.0	3/4	M5121110602#	-	01
2.5	1	M5121110603#	-	01



**CONCEALED VALVE  
SWEPT TYPE  
(CHROME PLATED)  
(SQUARE)**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0 (Long)	3/4	M5121113302#	01	20
2.5 (Long)	1	M5121113303#	01	20
2.0 (short)	3/4	M5121113402#	01	20
2.5 (short)	1	M5121113403#	01	20



**CONCEALED  
VALVE  
(WHEEL TYPE)**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
1.5	1/2	M5121118601	01	20
2.0	3/4	M5121118602	02	16
2.5	1	M5121118603#	-	01



**CONCEALED VALVE.  
SWEPT TYPE  
(CHROME PLATED)  
(FLOWER)**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0 (Long)	3/4	M5121113502#	01	20
2.5 (Long)	1	M5121113503#	01	20
2.0 (short)	3/4	M5121113602#	01	20
2.5 (short)	1	M5121113603#	01	20



**CONCEALED VALVE  
SWEPT TYPE  
(CHROME PLATED)  
(TRIANGLE)**



**CONCEALED VALVE  
SWEPT TYPE  
(CHROME PLATED)  
(ROUND)**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0 (Long)	3/4	M5121113102#	01	20
2.5 (Long)	1	M5121113103#	01	20
2.0 (short)	3/4	M5121113202#	01	20
2.5 (short)	1	M5121113203#	01	20



**WHEEL KNOB**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0	3/4	WH-VAL-A# Ø	-	01



**FANCY HANDLE  
(KNOB) WITH  
RED & BLUE  
PLASTIC BUTTON  
(TRIANGLE)**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0	3/4	RM04159009	-	01



**S.S. FLANGE  
WITH RUBBER  
GROMET**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0	3/4	RM04159004	-	01



**FANCY HANDLE  
(KNOB) WITH  
RED & BLUE  
PLASTIC BUTTON  
(SQUARE)**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0	3/4	RM04159006	-	01



**BRASS PIPE (C.P.)**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0 (Long)	3/4	RM04159005#	-	01
2.0 (short)	3/4	RM04159015#	-	01



**FANCY HANDLE  
(KNOB) WITH  
RED & BLUE  
PLASTIC BUTTON  
(ROUND)**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0	3/4	RM04159007	-	01



**SPINDLE VALVE  
PART WITH  
GASKET**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0(Short)	3/4	RM04159010	-	01
2.0(Long)	3/4	RM04159011	-	01
2.5(Short)	1	RM04159012	-	01
2.5(Long)	1	RM04159013	-	01



**FANCY HANDLE  
(KNOB) WITH  
RED & BLUE  
PLASTIC BUTTON  
(FLOWER)**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0	3/4	RM04159008	-	01



**VALVE  
SPINDLE WITH  
'O' RING+  
SHEET  
METAL LOCK**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0	3/4	FA-VAL-E	-	01

# CPVC PRO PIPE & FITTINGS

CTS - AS PER ASTM D2846



**VALVE PART  
WITH GASKET &  
'O' RING**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0	3/4	FA-VAL-F	-	01



**WHEEL  
TYPE VALVE**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
1.5	1/2	RM04152012	-	01
2.0	3/4	RM04152034	-	01
2.5	1	RM04152001#	-	01



**SPINDLE VALVE  
PART WITH  
GASKET**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
1.5	1/2	RM04159001	-	01
2.0	3/4	RM04159002	-	01
2.5	1	RM04159003	-	01



**VALVE BODY  
WITH 'O' RING +  
VALVE BUSH**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0	3/4	WH-VAL-B#	-	01



**CONCEALED  
CROME PLATED  
VALVE**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
1.5	1/2	RM04151012	-	01
2.0	3/4	RM04151034	-	01
2.5	1	RM04151001	-	01



**VALVE SPINDLE  
WITH 'O' RING**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0	3/4	WH-VAL-C#	-	01



**VALVE BODY  
WITH 'O' RING**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0	3/4	FA-VAL-D	-	01



**VALVE PART  
WITH GASKET**


Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0	3/4	WH-VAL-D#	-	01



Only those products bearing the  
above marks are certified



### BALL VALVES (CTS SOCKETS)



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)
		Std.	Mast.
1.5	1/2	M512112701	- 80
2.0	3/4	M512112702	- 100
2.5	1	M512112703	- 60
3.2	1 1/4	M512112704	- 40
4.0	1 1/2	M512112705	- 25
5.0	2	M512112706	- 14



### BALL VALVE HANDLE



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)
		Std.	Mast.
1.5	1/2	M512118001	- 01
2.0	3/4	M512118002	- 01
2.5	1	M512118003	- 01
3.2	1 1/4	M512118004	- 01
4.0	1 1/2	M512118005	- 01
5.0	2	M512118006	- 01



### BALL VALVE LONG HANDLE (CTS SOCKET)



### LONG RADIUS BEND



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)
		Std.	Mast.
1.5	1/2	M512112701LH	- 80
2.0	3/4	M512112702LH	- 100
2.5	1	M512112703LH	- 50
3.2	1 1/4	M512112704LH	- 40
4.0	1 1/2	M512112705LH	- 30
5.0	2	M512112706LH	- 15

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)
		Std.	Mast.
2.0	3/4	M512110902	10 140
2.5	1	M512110903	10 80
3.2	1 1/4	M512110904	10 50
4.0	1 1/2	M512110905	05 30
5.0	2	*F512110906	- 14



### BALL VALVE LONG HANDLE



### STEP OVER BEND



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)
		Std.	Mast.
1.5	1/2	M016118001	- 01
2.0	3/4	M016118002	- 01
2.5	1	M016118003	- 01
3.2	1 1/4	M016118004	- 01
4.0	1 1/2	M016118005	- 01
5.0	2	M016118006	- 01

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)
		Std.	Mast.
1.5	1/2	M512112801	10 150
2.0	3/4	M512112802	10 200
2.5	1	M512112803	10 150
3.2	1 1/4	*F512112804	- 30
4.0	1 1/2	*F512112805	- 20
5.0	2	*F512112806	- 10

# CPVC PRO PIPE & FITTINGS

## COPPER TUBE SIZE - AS PER ASTM D2846



**ALL TOP ADAPTOR  
(3 IN 1 WALL  
MIXER ADAPTOR)**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0 x 1.5	¾ x ½	M512510614	-	06
2.5 x 1.5	1 x ½	M512510615	-	06



**HOT SIDE - COLD  
DOWN ADAPTOR  
(3 IN 1 WALL  
MIXER ADAPTOR)**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0 x 1.5	¾ x ½	M512511014	-	06
2.5 x 1.5	1 x ½	M512511015	-	06



**TOP BOTTOM  
ADAPTOR  
(3 IN 1 WALL  
MIXER ADAPTOR)**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0 x 1.5	¾ x ½	M512510714	-	06
2.5 x 1.5	1 x ½	M512510715	-	06



**EXTENSION PIECES  
(CHROME PLATED)  
(MEDIUM DUTY)**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.5	1	T143-010M	-	96
4.0	1½	T143-015M	-	64
5.0	2	T143-020M	-	48
6.5	2½	T143-025M	-	40
8.0	3	T143-030M	-	32
10.0	4	T143-040M	-	24
12.5	5	T143-050M	-	20
15.0	6	T143-060M	-	16



**TOP SIDE ADAPTOR  
(3 IN 1 WALL  
MIXER ADAPTOR)**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0 x 1.5	¾ x ½	M512510814	-	06
2.5 x 1.5	1 x ½	M512510815	-	06



**EXTENSION PIECES  
(CHROME PLATED)  
(HEAVY DUTY)**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.5	1	T143-010H	-	96
4.0	1½	T143-015H	-	64
5.0	2	T143-020H	-	48
6.5	2½	T143-025H	-	40
8.0	3	T143-030H	-	32
10.0	4	T143-040H	-	24
12.5	5	T143-050H	-	20
15.0	6	T143-060H	-	16



**HOT UP - COLD  
DOWN ADAPTOR  
(3 IN 1 WALL  
MIXER ADAPTOR)**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
2.0 x 1.5	¾ x ½	M512510914	-	06
2.5 x 1.5	1 x ½	M512510915	-	06



Only those products bearing the  
above marks are certified



**END PLUG  
THREADED**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.) Std. Mast.
1.5	1/2	M214002901	- 300
2.0	3/4	M214002902	- 200



**METAL STRAP**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.) Std. Mast.
1.5	1/2	T9120M	- 900
2.0	3/4	T9340M	- 600
2.5	1	T9100M	- 500
3.2	1 1/4	T9105M	- 400
4.0	1 1/2	T9106M	- 300
5.0	2	T9200M	- 250



**PLASTIC STRAP  
(PP)**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.) Std. Mast.
1.5	1/2	M214006001	- 1500
2.0	3/4	M214006002	- 2400
2.5	1	M214006003	- 1600
3.2	1 1/4	M214006004	- 900
4.0	1 1/2	M214006005	- 600
5.0	2	M214006006	- 400



**PLASTIC STRAP  
(NYLON)**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.) Std. Mast.
1.5	1/2	M214006101	- 1500
2.0	3/4	M214006102	- 2400
2.5	1	M214006103	- 1600
3.2	1 1/4	M214006104	- 900
4.0	1 1/2	M214006105	- 600
5.0	2	M214006106	- 400



**ELBOW HOLDER**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.) Std. Mast.
1.5 x 1.5	1/2 x 1/2	M214006701	- 500
2.0 x 1.5	3/4 x 1/2	M214006714	- 400



**TEE HOLDER**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.) Std. Mast.
1.5 x 1.5	1/2 x 1/2	M214006801	- 01
2.0 x 1.5	3/4 x 1/2	M214006814	- 400


# CPVC PRO PIPE & FITTINGS

## SCH - 40 FITTINGS AS PER ASTM F438

ASTRAL  
**CPVC PRO**<sup>®</sup>




**COUPLER - SOC**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
6.5	2½	M512401007	05	20
8.0	3	M512401008	05	15
10.0	4	M512401009	-	08




**ELBOW 90° - SOC**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
6.5	2½	M512400507	05	15
8.0	3	M512400508	-	10
10.0	4	M512400509	-	06



**TEE - SOC**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
6.5	2½	M512400107	-	12
8.0	3	M512400108	-	08
10.0	4	M512400109	-	04



**END CAP - SOC**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
6.5	2½	M512404107	05	10
8.0	3	M512404108	05	10
10.0	4	M512404109	-	10



**REDUCER BUSHING (SPGXSOC)**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
6.5 x 2.5	2½ x 1	A512401931	-	01
6.5 x 3.2	2½ x 1¼	M512401932	05	25
6.5 x 4.0	2½ x 1½	M512401933	05	25
6.5 x 5.0	2½ x 2	M512401934	05	25
8.0 x 2.5	3 x 1	A512401937	-	01
8.0 x 4.0	3 x 1½	M512401939	05	20
8.0 x 5.0	3 x 2	M512401940	05	20
8.0 x 6.5	3 x 2½	M512401941	05	20
10.0 x 5.0	4 x 2	M512401947	05	10
10.0 x 6.5	4 x 2½	M512401948	05	10
10.0 x 8.0	4 x 3	M512401949	05	10



**LONG RADIUS BEND WITH SOCKET**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
6.5	2½	▫F512400907	-	06
8.0	3	▫F512400908	-	05
10.0	4	▫F512400909	-	04


Note: Fabricated reducer fittings are not eligible for return to the manufacturer. SOC-SOCKET, SPG - SPIGOT  
All the items where product code starts with "A" are assembled items.

# CPVC PRO PIPE & FITTINGS

## SCH 80 FITTINGS AS PER ASTM F439




**COUPLER - SOC**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
6.5	2½	M512801007	05	20
8.0	3	M512801008	05	15
10.0	4	M512801009	-	12
15.0	6	M512801010	-	02
20.0	8	M512801011	-	01
25.0	10	M512801012	-	01
30.0	12	M512801013#	-	01




**ELBOW 45° - SOC**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
6.5	2½	M512802307	05	20
8.0	3	M512802308	-	12
10.0	4	M512802309	-	06
15.0	6	M512802310	-	02
20.0	8	M512802311	-	01




**ELBOW 90° - SOC**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
6.5	2½	M512800507	05	15
8.0	3	M512800508	-	10
10.0	4	M512800509	-	05
15.0	6	M512800510	-	02
20.0	8	M512800511	-	01




**TEE - SOC**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
6.5	2½	M512800107	05	12
8.0	3	M512800108	-	07
10.0	4	M512800109	-	04
15.0	6	M512800110	-	02
20.0	8	M512800111#	-	01




**MALE ADAPTOR (CPVC THREADS)**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
6.5	2½	M512801307	05	30
8.0	3	M512801308	05	20
10.0	4	M512801309	-	15



**MALE ADAPTOR (BRASS THREADS)**




Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
6.5	2½	M512801407	-	09
8.0	3	M512801408	-	08
10.0	4	M512801409	-	04



Only those products bearing the  
above marks are certified



### FEMALE ADAPTOR (CPVC THREADS)



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
6.5	2½	M512801607	05	30
8.0	3	M512801608	05	20
10.0	4	M512801609	-	12



### TANK ADAPTOR (LONG)

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
6.5	2½	*F512806507	-	15
8.0	3	*F512806508	-	09



### FEMALE ADAPTOR (BRASS THREADS)



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
6.5	2½	M512801707	-	09
8.0	3	M512801708	-	07
10.0	4	M512801709	-	06



### END CAP - SOC



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
6.5	2½	M512804107	-	55
8.0	3	M512804108	-	39
10.0	4	M512804109	-	18
15.0	6	M512804110	-	06



### REDUCER COUPLER - SOC



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.)	
			Std.	Mast.
6.5 x 3.2	2½ x 1¼	M512801132	08	48
6.5 x 4.0	2½ x 1½	M512801133	05	40
6.5 x 5.0	2½ x 2	M512801134	05	40
8.0 x 3.2	3 x 1¼	M512801138	-	30
8.0 x 4.0	3 x 1½	M512801139	-	27
8.0 x 5.0	3 x 2	M512801140	05	25
8.0 x 6.5	3 x 2½	M512801141	05	25
10.0 x 4.0	4 x 1½	M512801146	-	16
10.0 x 5.0	4 x 2	M512801147	-	16
10.0 x 6.5	4 x 2½	M512801148	-	15
10.0 x 8.0	4 x 3	M512801149	-	15
15.0 x 5.0	6 x 2	M512801155	-	04
15.0 x 6.5	6 x 2½	M512801156	-	04
15.0 X 8.0	6 X 3	M512801157	-	04
15.0 X 10.0	6 X 4	M512801158	-	04
20.0 X 15.0	8 X 6	M512801168	-	02

Sizes above '6" will be in Grey colour

\* Reducer fittings are professionally assembled using Astral fittings and bushings. Quantity as per order.

Note: Fabricated reducer fittings are not eligible for return to the manufacturer. SOC - SOCKET


All the items where product code starts with "A" are assembled items. All the items where product code starts with "F" are fabricated items.

# CPVC PRO PIPE & FITTINGS

## SCH - 80 FITTINGS AS PER ASTM F439



**REDUCER TEE -  
SOC**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.) Std. Mast.
6.5x2.5	2½ x 1	M512800231	- 15
6.5x3.2	2½ x 1¼	M512800232	- 15
6.5x4.0	2½ x 1½	M512800233	- 15
6.5x5.0	2½ x 2	M512800234	- 12
8.0x2.5	3 x 1	M512800237	- 12
8.0x3.2	3 x 1¼	M512800238	- 12
8.0x4.0	3 x 1½	M512800239	- 10
8.0x5.0	3 x 2	M512800240	- 09
8.0x6.5	3 x 2½	M512800241	- 09
10.0x2.5	4 X 1	M512800244	- 05
10.0x3.2	4 X 1¼	M512800245	- 05
10.0x4.0	4 X 1½	M512800246	- 05
10.0x5.0	4 X 2	M512800247	- 05
10.0x6.5	4 X 2½	M512800248	- 05
10.0x8.0	4 X 3	M512800249	- 05
15.0x5.0	6 x 2	M512800255	- 02
15.0x6.5	6 x 2½	M512800256#	- 02
15.0x8.0	6 x 3	M512800257	- 02
15.0x10.0	6 x 4	M512800258	- 02
20.0x10.0	8 x 4	A512800267*	- 01
20.0x15.0	8 x 6	A512800268*	- 01



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.) Std. Mast.
6.5	2½	M512803307	- 12
8.0	3	M512803308	- 10
10.0	4	M512803309	- 06



**REDUCER  
BUSHING  
(SPGXSOC)**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.) Std. Mast.
6.5 x 3.2	2½ x 1¼	M512801932	05 50
6.5 x 4.0	2½ x 1½	M512801933	05 50
6.5 x 5.0	2½ x 2	M512801934	05 50
8.0 x 3.2	3 x 1¼	M512801938	
8.0 x 4.0	3 x 1½	M512801939	05 35
8.0 x 5.0	3 x 2	M512801940	05 35
8.0 x 6.5	3 x 2½	M512801941	05 35
10.0 x 5.0	4 x 2	M512801947	05 20
10.0 x 6.5	4 x 2½	M512801948	05 10
10.0 x 8.0	4 x 3	M512801949	05 20
15.0 x 8.0	6 x 3	M512801957	- 06
15.0 x 10.0	6 x 4	M512801958	- 06
20.0 x 10.0	8 x 4	M512801967	- 03
20.0 x 15.0	8 x 6	M512801968	- 03



**VANSTONE  
FLANGE - SOC**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.) Std. Mast.
6.5	2½	M512803407	- 15
8.0	3	M512803408	- 12
10.0	4	M512803409	- 08
15.0	6	M512803410	- 03
20.0	8	M512803411	- 01



**BLIND FLANGE**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.) Std. Mast.
8.0	3	M512803108	- 20
10.0	4	M512803109	- 12



Only those products bearing the  
above marks are certified



**FLANGE - SOC  
(ONE PIECE)**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.) Std. Mast.
8.0	3	M512803208	- 12
10.0	4	M512803209	- 08



**FLANGE  
HUB SPG**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.) Std. Mast.
6.5	2½	M512803707	- 01
8.0	3	M512803708	- 01
10.0	4	M512803709	- 01




**FLANGE  
RING - SOC**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.) Std. Mast.
6.5	2½	M512804207	- 01
8.0	3	M512804208	- 01
10.0	4	M512804209	- 01
15.0	6	M512804210	- 01
20.0	8	M512804211	- 01



**UNION - SOC**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.) Std. Mast.
6.5	2½	M512802607	- 15
8.0	3	M512802608	- 10
10.0	4	M512802609	- 04



**FLANGE  
HUB - SOC**



Size (cm)	Size (inch)	Product Code	Pkg.(Nos.) Std. Mast.
6.5	2½	M512803607	- 01
8.0	3	M512803608	- 01
10.0	4	M512803609	- 01
15.0	6	M512803610	- 01
20.0	8	M512803611	- 01



**HEX NIPPLE**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.) Std. Mast.
2.0	¾	M5128012702	100 600
2.5	1	M5128012703	50 350

# CPVC PRO PIPE & FITTINGS

## VALVES - TRADING



**TRUE UNION  
IND BALL VALVE  
SOC EPDM**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.) Std. Mast.
6.5	2½	1822-025C°	- 01
8.0	3	1822-030C°	- 01
10.0	4	1822-040C°	- 01
15.0	6	1822-060C°	- 01
20.0	8	1822-080C°	- 01



**WAFER  
BUTTERFLY  
VALVE VITON  
W/HANDLE**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.) Std. Mast.
6.5	2½	753311-025C°	- 01
8.0	3	753311-030C°	- 01
10.0	4	753311-040C°	- 01
15.0	6	753311-060C°	- 01
20.0	8	753311-080C°	- 01



**TRUE UNION  
IND BALL CHECK  
SOC EPDM**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.) Std. Mast.
6.5	2½	4522-025C°	- 01
8.0	3	4522-030C°	- 01
10.0	4	4522-040C°	- 01
15.0	6	4522-060C°	- 01
20.0	8	4522-080C°	- 01



**BALL VALVE  
SPEARS**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.) Std. Mast.
1.5	½	1922 - 005	- 01
2.0	¾	1922 - 007	- 01
2.5	1	1922 - 010	- 01
3.2	1¼	1922 - 012	- 01
4.0	1½	1922 - 015	- 01
5.0	2	1922 - 020	- 01



**STD. BUTTERFLY  
VALVE EPDM  
W/HANDLE**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.) Std. Mast.
6.5	2½	722311-025C°	- 01
8.0	3	722311-030C°	- 01
10.0	4	722311-040C°	- 01
15.0	6	722311-060C°	- 01
20.0	8	722311-080C°	- 01



**NRV**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.) Std. Mast.
2.0	¾	M5128013902	01 60
2.5	1	M5128013903	01 40

# CPVC PRO PIPE & FITTINGS

## SOLVENT CEMENTS & PRIMER



ASTRAL  
**CPVC PRO**



**IPS WELD-ON  
500 CTS  
ADHESIVE TUBE  
(YELLOW)**

Qty. (ml)	Product Code	Pkg.(Nos.) Std. Mast.
22	TTINS-2217	- 48
44	TTINS-44	- 24



**IPS WELD-ON  
500 CTS ADHESIVE  
SOLUTION  
(YELLOW)**  
SUITABLE FOR (1/2"-2")  
SDR 11 SDR 13.5

Qty. (ml)	Product Code	Pkg.(Nos.) Std. Mast.
50	CTS-500-50	- 48
118	CTS-500-118	- 24
237	CTS-500-237	- 24
473	CTS-500-473	- 12
946	CTS-500-946	- 12

For sizes 65 mm and above use cpvc 724 adhesive solution



**PIPEFIX  
CPVC 307**

Qty. (ml)	Product Code	Pkg.(Nos.) Std. Mast.
50	T003605005A	- 48
118	T003605010A	- 24
237	T003605015A	- 24
473	T003605020A	- 12
946	T003605025A	- 12



**RESCUE TAPE**

Size (ft.)	Product Code	Pkg.(Nos.) Std. Mast.
5	RSCU-TAPE-05-CLR	- 120
5	RSCU-TAPE-05-RED	- 120
5	RSCU-TAPE-05-BLK	- 120
10	RSCU-TAPE-10-CLR	- 120
10	RSCU-TAPE-10-RED	- 120
10	RSCU-TAPE-10-BLK	- 120
15	RSCU-TAPE-15-CLR	- 120
15	RSCU-TAPE-15-RED	- 120
15	RSCU-TAPE-15-BLK	- 120



**IPS WELD-ON  
PRIMER P 70  
(2½"-12") SCH40  
SCH80**

Qty. (ml)	Product Code	Pkg.(Nos.) Std. Mast.
473	TEZ-221	- 12
946	TEZ-222	- 12

N.B. Must use primer for 65 mm (2½") & above



**CPVC 724  
(2½"-12") SCH40  
SCH80**

Qty. (ml)	Product Code	Pkg.(Nos.) Std. Mast.
473	TIPS-473	- 12
946	TIPS-946	- 12

N.B. For sizes 65 mm (2½") and above

# CPVC PRO PIPE & FITTINGS

## ANCILLARY PRODUCTS



**BONDSET  
FAST SETTING**

Qty. (gm)	Product Code	Pkg.(Nos.) Std. Mast.
50	BONDSETFS-50N	- 01
100	BONDSETFS-100N	- 01



**PTFE TAPE  
(12 MM WIDTH)**

Size (m)	Product Code	Pkg.(Nos.) Std. Mast.
4	PTFE-1204	- 01
8	PTFE-1208	- 01
8	PTFE-1208-YEL	- 01



**RATCHET  
CUTTER**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.) Std. Mast.
1.5 - 3.2	½ - 1¼	TTOOLS-1Ø	- 01



**RESI-SHIELD**

Size	Product Code	Pkg.(Nos.) Std. Mast.
100ML	RESI-SHIELD-100ML	- 100
200ML	RESI-SHIELD-200ML	- 50
500ML	RESI-SHIELD-500ML	- 25
1 L	RESI-SHIELD-1L	- 12
5 L	RESI-SHIELD-5L	- 03
20 L	RESI-SHIELD-20L	- 01



**TOOLKIT  
BOX**

Size (cm)	Size (inch)	Product Code	Pkg.(Nos.) Std. Mast.
30.0	12	M252009100	- 10

# INSTALLATION PROCEDURE



## 1. CUTTING

In order to make a proper and neat joint, measure the pipe length accurately and make a small mark. Ensure that the pipe and fittings are size compatible. You can easily cut with a wheel type plastic pipe cutter or hacksaw blade. Cutting tubing as squarely as possible provides optimal bonding area within a joint.



## 2. DEBURRING/ BEVELING

Burrs and filings can prevent proper contact between tube and fitting during assembly and should be removed from the outside and inside of the pipe. Debarking tool, pocket knife or file are suitable for this. A slight bevel on the end of the tubing will ease entry of the tubing into the fitting socket.



## 3. FITTING PREPARATION

Using a clean, dry rag, wipe dirt and moisture from the fitting sockets and tubing end. The tubing should make contact with the socket wall 1/3 to 2/3 of the way into the fitting socket.

## 4. SOLVENT CEMENT APPLICATION

Use only CPVC cement or an all - purpose cement conforming to ASTM F-493 or joint failure may result. When making a joint, apply a heavy, even coat of cement to the pipe end. Use the same applicator without additional cement to apply a thin coat inside the fitting socket. Too much cement can cause clogged water ways.



## 5. ASSEMBLY

Immediately insert the tubing into the fitting socket, rotate the tube  $\frac{1}{4}$  to  $\frac{1}{2}$  turn while inserting. This motion ensures an even distribution of cement within the joint. Properly align the fittings. Hold the assembly for approximately 10 seconds, allowing the joint to set-up.



## 6. SET AND CURE

Solvent cement set and cure times are a function of pipe size, temperature and relative humidity. Curing time is shorter for drier environments, smaller sizes and higher temperatures. It requires 10 to 20 minutes for perfect joint.

Note: For sizes above 65 mm (2½") use IPS 70 primer before applying solvent cement. The purpose of a primer is to penetrate and soften the surfaces so they can stick together. The proper use of a primer ensures that the surfaces are prepared for fusion in a wide variety of weather conditions.



# HOW TO USE SOLVENT CEMENT PRIMER & CLEANER

## JOINT CURING

Recommended initial set times

Temperature Range	Pipe Size $\frac{1}{2}''$ to $1\frac{1}{4}''$ (15 mm to 32 mm)	Pipe Size $1\frac{1}{2}''$ to $3''$ (40 mm to 80 mm)	Pipe Size $4''$ to $8''$ (100 mm to 200 mm)	Pipe Size $10''$ to $12''$ (250 mm to 300 mm)
15.5°C - 37.7°C	15 min.	30 min.	1 hrs.	2 hrs.
4.4°C - 15.5°C	1 hrs.	2 hrs.	4 hrs.	8 hrs.

Recommended initial cure times

Temperature Range	Pipe Size $\frac{1}{2}''$ to $1\frac{1}{4}''$ (15 mm to 32 mm)	Pipe Size $1\frac{1}{2}''$ to $3''$ (40 mm to 80 mm)	Pipe Size $4''$ to $8''$ (100 mm to 200 mm)	Pipe Size $10''$ to $12''$ (250 mm to 300 mm)
15.5°C - 37.7°C	6 hrs.	12 hrs.	24 hrs.	48 hrs.
4.4°C - 15.5°C	12 hrs.	24 hrs.	48 hrs.	96 hrs.

## CHOOSING SOLVENT CEMENTS & PRIMERS

Solvent cements for Astral CPVC PRO systems must conform to the requirements of ASTM F-493 or equivalent and should carry this identification on the can / tube label. A primer or cleaner must be used. Primers for PVC pipe can be used for CPVC. The National Sanitation Foundation (NSF) mark or other potable water approval should also be located on the container.

Certain code bodies require orange CPVC solvent cement and purple primer to facilitate identification by plumbing inspectors. However, unpigmented (clear) CPVC solvent cement and primer are available and accepted by various jurisdictions. If you decide to use clear products, we strongly recommend contracting the local plumbing inspector prior to beginning a job to determine whether these clear cements and primers are acceptable or not.

## CPVC SOLVENT CEMENT'S SHELF LIFE

CPVC solvent cement are formulated to have a Shelf life of two years. Cans are usually marked with manufacturing dates. Good CPVC solvent cement should have the consistency of syrup or honey with no undissolved materials. Aged cement will often change colour or begin to thicken and become gelatinous or jelly-like. When this occurs, the cement must be thrown away.

## SOLVENT CEMENT FREEZING

Use the same precautions to protect CPVC solvent cement from freezing as you would with PVC cement. Once cement gels, it can not be recovered and should be discarded.

## BEFORE BEGINNING

1. Verify the cement is the same as the pipes and fittings being used.
2. Check the temperature where the cementing will take place.
  - Cement take longer time to set up in cold weather. Be sure to allow extra time for curing. Do not try to speed up the cure by artificial means this could cause porosity and blisters in the cement film.
3. Solvents evaporate faster in warm weather. Work quickly to avoid the cement setting up before the joint is assembled. Keep the cement as cool as possible. Try to stay out of direct sunlight.
4. Keep the lid on cements, cleaner, and primers when not in use. Evaporation of the solvent will effect the cement.
5. Stir or shake cement before using.
6. Use 20 mm ( $\frac{3}{4}''$ ) dauber on small diameter pipes, 40 mm ( $1\frac{1}{2}''$ ) dauber, upto 80 mm (3") pipe, and a natural bristle brush, swab, or roller having size of  $\frac{1}{2}$  the pipe diameter on pipes from 100 mm (4") and up.
7. Do not mix cleaner or primer with cement.
8. Do not use thickened or lumpy cement. It should be like the consistency of syrup or honey.
9. Do not handle joints immediately after assembly.
10. Do not allow daubers to dry out.
11. Maximum temperature allowable for CPVC pipe is 180°F.
12. All coloured cements, primers, and cleaners will have a permanent stain. There is no known cleaning agent.
13. Use according to the step outline in ASTM D-2846, joining of pipe and fittings.



# PRESSURING SOLVENT ADHESIVE JOINTS

In order to develop full strength of Solvent Adhesives Joints, adequate care should be taken.

Before the joints get exposed to pressuring, many factors will impact the required fixing time.

- A. Onsite temperature and humidity
- B. Pipe diameter (larger diameter joints require more time to cure)
- C. Internal operating pressure
- D. Internal operating temperature

In general, the fixing time will allow cold-water lines to be pressurized to the cited levels shown.

As per the standard practices, before operating the hot-water lines additional 50% fixing time required than the cold-water lines. Professionals doing repair or maintenance work should give adequate fixing time to the hot-water lines before pressurizing the system.

## **Hot Weather Solvent Adhesive Application Above 86°F (30°C)**

- Store solvent adhesive, pipes as well as fittings in a dry, cool and shaded area
- Need to make sure that the surface is dry prior applying solvent adhesive
- Make sure surface is dry prior to application of solvent adhesive
- Need to make sure both the surfaces to be joined by solvent are properly coated with the solvent adhesives
- Stir or shake the solvent adhesive properly before use
- System anchoring and final connections should be made during the cooler hours of the day to account for expansion and contraction.

## **System Acceptance (Hydrostatic Pressure) Test**

Once an installation is completed and fixing time is given as per these recommendations. The system should be hydrostatically pressure tested at design pressure  $\times$  1.5 times for one hour. When pressure testing, the system should be filled with water and all air removed from the farthest and highest point in the run. If a leak is found, the joint must be cut out and discarded and a new section should be installed using couplings.

Danger: Pressure testing with compressed air is dangerous and can result in injury or death. Do not use air to test CPVC Pro pipe, fittings and accessories.

## **TESTING OF INSTALLATIONS**

1. Prior to a test, a visual inspection of the system shall be conducted to ensure that the recommended installation procedure has been followed and the pipeline, appliances, valves, and fittings have been installed correctly. Upon completion of installation, pipework, fittings, and appliances shall be hydraulically tested and inspected. Pressure tests should not be conducted on solvent-welded pipes until at least 24 hours after the last solvent weld has been completed.
2. During the test, all control valves should be left open and all open ends should be temporarily closed with water-tight fittings. Testing pressure shouldn't be less than one and a half times the expected operating pressure of the pipe. However, it is important to ensure the pressure does not exceed the working pressure of the lowest rated component of the system.
3. Apply pressure either by hand pump or power-driven pump. To ensure that test pressures are not exceeded, pressure gauges must be properly positioned and carefully observed. Slowly and carefully fill the system with water to avoid surge pressure of water hammer. The vents on all high points should be open during filling so that air can be expelled from the system.
4. As soon as the system is fully charged with water and air displaced from the line, air vents need to be closed, and the line should be inspected for seepage at joints and firmness under load. A pressure of one hour may then be applied when the  $1.5 \times$  Expected Operating Water Pressure OR Pressure Rating of the Lowest Pressure Rated Part (e.g. valve or flange) is reached. Check each joint for leaks or water seepage again after an hour.

## USE OF CPVC PIPES & FITTINGS IN SOLAR APPLICATION

Since the outlet of water heater remains excessive hot due to elevated temperature from the thermal radiation steam, CPVC pipes or fittings should not be connected directly to the outlet as the excessive heat exposure can lead to distortion and deformation of the product.

Need to follow below mentioned guidelines for while using Astral CPVC Pro pipes and fittings in Solar application

### DO'S

- Connect GI pipe of 1m length with solar water heater outlet, then use CPVC pipes and fittings
- Use expansion loop for exposed pipes on every 9-12 feet pipe run
- Always use proper support on specified distance to damp exposed pipes

### DON'TS

- Never connect Astral CPVC Pro pipes or fittings directly with solar water heater outlet
- Never use CPVC pipes without expansion loop or offset
- Don't clamp pipes near loop or offset

# IMPORTANT NOTES

## NUMBER OF JOINTS PER LITER OF CEMENT BY PIPE SIZE



Dia of Pipe		Appx. Nos of joints*
(mm)	(in.)	
15	1/2	1200
20	3/4	750
25	1	500
32	1 1/4	450
40	1 1/2	325
50	2	225
65	2 1/2	50
75	3	40
100	4	30
150	6	10
200	8	5
250	10	2-4
300	12	1-2

\* Approximate numbers of joints which can be made per ltr. of solvent cement

\* For primer, number of joints are approximate double than solvent cement

## SAFE HANDLING OF SOLVENT CEMENT

When using solvent cements, primers and cleaners there are some basic safety measures.

### ALL USERS SHOULD KEEP IN MIND.

- Avoid prolonged breathing of solvent vapors. When pipes and fittings are being joined in enclosed area, the use of ventilating devices are advised.
- Keep cements, primers and cleaners away from all the sources of ignition, heat, sparks and open flame.
- Keep containers of cements, primers and cleaners tightly closed except when the product is being used.
- Dispose of all rags used with solvents in a proper outdoor waste receptacle.
- Avoid eye & skin contact. In case of eye contact, flush with plenty of water for 15 minutes & call a physician.

## THREAD SEALANTS

Threaded CPVC fittings with tapered pipe threads (e.g. male thread adapters) must be used with a suitable thread sealant to insure leak-proof joints. Over the years, PTFE (Teflon® or equivalent) tape has been the preferred thread sealant, it is still the most widely accepted and approved thread sealant. Some paste sealant can affect CPVC fittings; therefore only sealants recommended for use with CPVC by the thread sealant manufacturer must be used.

# GENERAL GUIDELINE FOR ALL INSTALLATIONS

## DOS

1. Install product according to Astral's Installation instructions and manual and follow recommended safe work practices.
2. Keep Pipe and Fittings in original packaging until needed and store pipes in covered areas.
3. Use tools designed for use with plastic pipe and fittings.
4. Cut-off minimum 25 mm beyond the edge of the crack in case any crack is discovered on the pipe.
- 4A. Pipe may be cut quickly and efficiently by several methods. Wheel-type plastic tubing cutters are preferred. Ratchet type cutters or fine tooth saws are another option. However, when using the ratchet cutter, be certain to score the exterior wall by rotating the cutter blade in a circular motion around the pipe. Do this before applying significant downward pressure to finalise the cut. This step leads to a square cut. In addition, make sure ratchet cutter blades are sharp. Cutting pipe as squarely as possible provides optimal bonding area within a joint.
- 4B. Burrs and filings can prevent proper contact between the tube and fittings during assembly, and should be removed from the outside and inside of the pipe. A chamfering tool is preferred, but a pocket knife or file is also suitable for this purpose.
- 4C. Use only CPVC Cement or an all purpose solvent cement conforming to ASTM F-493 otherwise it may result in joint failure.
5. Always conduct hydraulic pressure testing after installation to detect any leaks and faults. Wait for appropriate cure time before pressure testing. Fill lines slowly and remove air from the system prior to pressure testing.
6. Rotate the pipe 1/4 to 1/2 to spread the CPVC Solvent Cement evenly in the joint while pushing the Pipe into Fitting.
7. Use Teflon tapes with threaded fittings.
8. Ensure that there are no sharp edges in contact with the pipe while embedding the pipes on the walls or in the floors.
- 8A. When making a transition connection to metal threads, use a special transition fitting or CPVC male

threaded adapter whenever possible. Do not over-torque plastic threaded connections. Head tight plus one-half turn should be adequate.

9. Provide Vertical & Horizontal Supports as recommended using the Plastic Straps only.
10. Apply a water- based paint only on exposed pipes & fittings.
11. Visually inspect all joints for proper cementing at the end of shift or day. A Visual inspection of the complete system is also recommended during pressure testing.
12. When connecting to a gas water heater, duct and CPVC should not be located within 50 cm of the duct. For water heaters lacking reliable temperature control, this distance may be increased up to 1 m. A metal nipple or flexible appliance connector should be utilized. This measure eliminates the potential for damage to plastic piping that might result from excessive radiant heat from the duct.
13. Use of a brass/CPVC transition adapter when connecting CPVC to a water heater will help facilitate water heater replacement in the future.
14. Pressure test CPVC systems in accordance with local code requirements.



## DON'TS

1. Do not use Metal Hooks or Nails to support / hold or put pressure on the pipes. Do not use straps & hangers with rough or sharp edges. Do not tighten the straps over the pipes.
2. Never expose the pipe to Open Flame while trying to bend it.
3. Do not drop pipes on edges from heights. Do not drop heavy objects on pipes or walk on pipes.
4. Do not dilute Solvent Cement with Thinner /MTO or any other liquid etc.
5. Do not use air or gases for pressure testings.
6. Do not use any other petroleum or solvent- based sealant, adhesive, lubricant or fire hazard material on CPVC pipes and fittings.
7. Do not use CPVC Pipes & Fittings for pneumatic applications.


ASTRAL LIMITED - Ahmedabad warrants to the original owner that the product will be free from manufacturing defect and confirms to current applicable ASTM standards under normal use. Buyer's remedy for breach of this warranty is limited to replacement of or credit for the defective product. This warranty excludes any expense for removal or reinstallation of any defective product and any other incidental, consequential or punitive damages.

The limited warranty only applicable if Astral CPVC PRO Pipes, Fittings & Weld-on solvent cement are used.



# NOTES



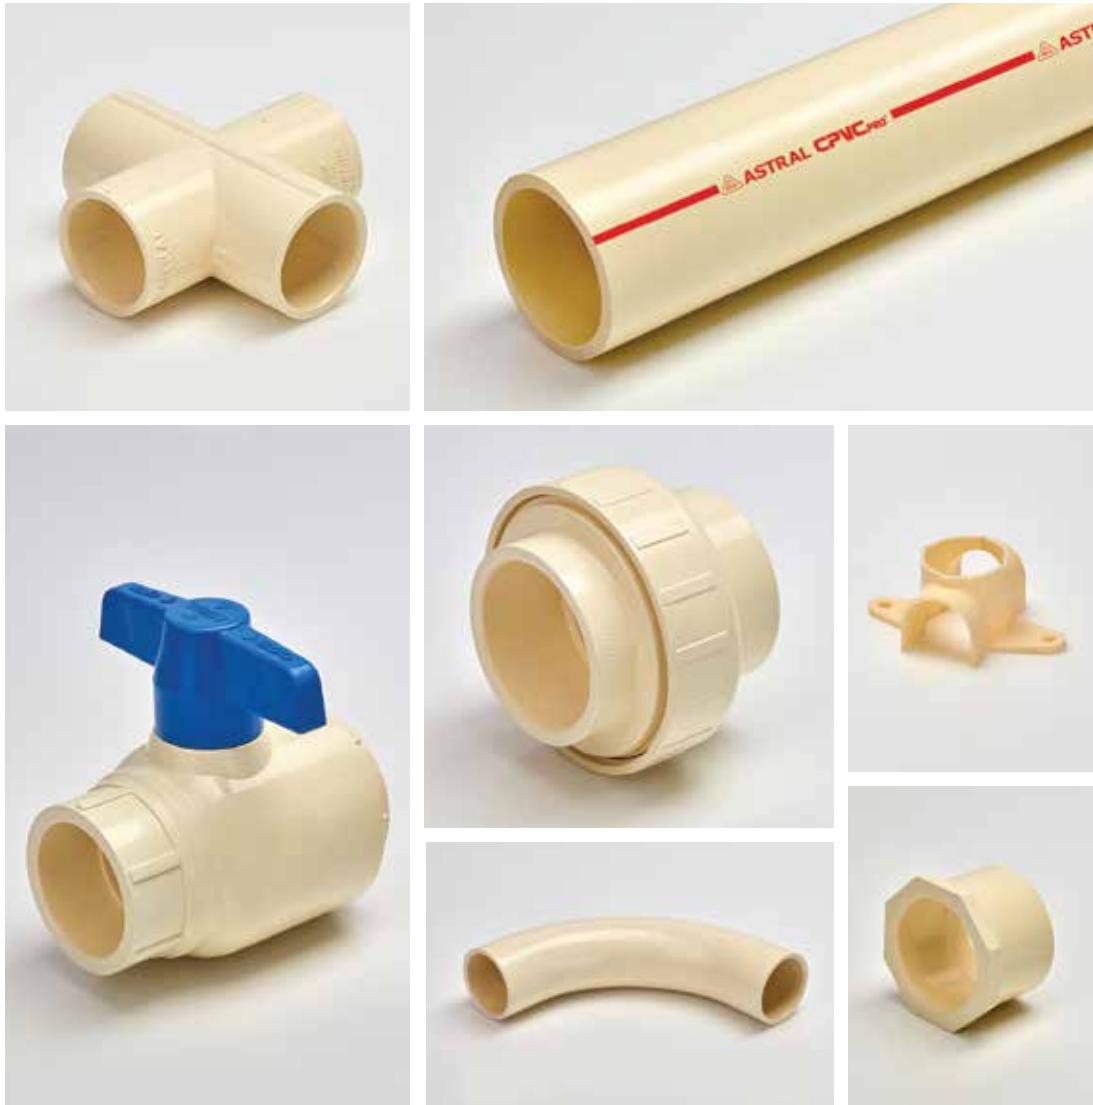

CIN NO: L25200GJ1996PLC029134

Registered & Corporate Office: Astral Limited

207/1, 'Astral House', B/h Rajpath Club, Off S. G. Highway, Ahmedabad - 380059.

Ph: +91-79 66212000 | Fax: +91-79 66212121 | E-mail: [info@astralpipes.com](mailto:info@astralpipes.com) | Website: [www.astralpipes.com](http://www.astralpipes.com)

For Export Inquiries: [export@astralpipes.com](mailto:export@astralpipes.com)



Power of Trust  
2022



ASTRAL TOLL FREE

1800 233 7957

Please get in touch with us  
between 10 AM to 6 PM on Monday  
to Saturday - except 1<sup>st</sup> Saturday  
and public holidays

SC: PR07000021

ACP/PC/001

REV:00/06/22